
# North Fork Fire Protection District Community Wildfire Protection Plan

# Jefferson County, Colorado



# Prepared by: Jefferson Conservation District, in conjunction with Jefferson County Department of Emergency Management 800 Jefferson County Parkway Golden, CO 80401

2011

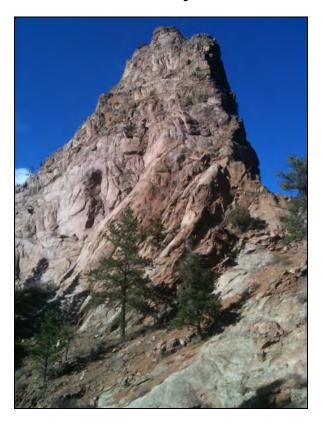





# North Fork Fire Protection District Community Wildfire Protection Plan

February, 2011

Prepared for:

Jefferson County Emergency Management

800 Jefferson County Parkway

Golden, CO 80419

Prepared by:

Robin P. Keith, Community Wildfire Protection Forester

Prepared by:

F. Scot Fitzgerald, GIS Specialist

Submitted by:

Jefferson Conservation District

Denver Federal Center

P.O. Box 25426

Denver, CO 80225-0426

#### Introduction

This Community Wildfire Protection Plan (CWPP) was developed for the North Fork Fire Protection District with guidance and support from Jefferson County Division of Emergency Management, Colorado State Forest Service and the United States Forest Service. The CWPP was developed according to the guidelines set forth by Healthy Forest Restoration Act (2003) and the Colorado State Forest Service - Minimum Standards for Community Wildfire Protection Plans (November, 2004). This CWPP supplements the Jefferson County Annual Operating Plan and the Jefferson County Fire Plan.

# Wildfire Prevention and Fire Loss Mitigation

The Jefferson County Division of Emergency Management, the Jefferson County Fire Council, and the North Fork Fire Protection District support and promote Firewise activities as outlined in the Jefferson County Fire Plan.

**Protection Capability** 

Initial response to all fire, medical and associated emergencies is the responsibility of the North Fork Fire Protection District. Wildland fire responsibilities of local fire departments, Jefferson County, Colorado State Forest Service, United States Forest Service, Bureau of Land Management and the U.S. Fish and Wildlife Service are described in the current *Jefferson County Annual Operating Plan*. All mutual aid agreements, training, equipment, and response are the responsibility of the local fire department and the agencies listed above.

The following agencies have	reviewed and agree t	to this Community	Wildfire Protection
Plan:			

Allen Gallamore

Colorado State Forest Service, Golden District

Rocco Snart

Jefferson County Sheriff's Office, Division of Emergency Management

Curt Rogers

North Fork Fire Protection District

# **TABLE OF CONTENTS**

	List of Acronyms and Abbreviations	
	Glossary of Fire Behavior Terms	ii
	EXECUTIVE SUMMARY	vi
1	INTRODUCTION	1
1	INTRODUCTION	
1.1	CWPP Purpose	
1.2	The North Fork Fire Protection District's need for a CWPP	
1.3	CWPP Process	
1.4	NFFPD CWPP Goals and Objectives	/
2	WILDLAND FIRE MANAGEMENT OVERVIEW	8
2.1	Wildland Fire Types	
2.2	Wildland Fire Behavior.	
2.3	History of Wildfire	
2.4	Fuels Management	
_,		
3	FIRE PROTECTION DISTRICT PROFILE	
3.1	County Setting and Assessment Area	
3.2	Climate	
3.3	Topography	
3.4	Wildland Vegetation and Fuels of the Assessment Area	14
3.5	Fire Protection Authority and Water Resources	
3.6	Values at Risk	18
4	WILDFIRE RISK ASSESSMENT METHODS	21
4.1	Components of Wildfire Hazard Analysis	
4.2	Fire Behavior Analysis	
4.3	Community Hazard Assessment Methods	
5	WILDFIRE MITIGATION PLAN	25
5.1	Mitigation Planning	
5.2	Recommended Actions.	
5.3	Treatment Options	
5.4	Project Support	
J. <del>T</del>	1 Toject Support	
6	EMERGENCY OPERATIONS	37
6.1	Response Resources	37
6.2	Emergency Procedures and Evacuation	
7	CWPP MONITORING & EVALUATION	40
7.1	CWPP Adoption	
7.2	Sustaining CWPP Efforts.	
7.2	CWPP Oversight, Monitoring & Evaluation	
1.5	Civil Gversight, Monitoring & Evaluation	
8	SORCE MATERIAL & REFERENCES	41

# LIST OF FIGURES

Figure I	Draft point (dry hydrant) near Longview	17
Figure 2	Pond and emergency fire equipment	18
Figure 3	Alluvial fan	19
Figure 4	Baehr Lodge	20
Figure 5	Defensible space	30
Figure 6	Shaded fuelbreak near Hayman fire	32
Figure 7	Shaded fuelbreak before and after treatment	33
Figure 8	Feller buncher machine	35

# LIST OF TABLES

Table 1	CWPP Development Process	4
Table 2	NFFPD CWPP Core Team Members	5
Table 3	NFFPD CWPP Goals and Objectives	7
Table 4	Fire Behavior Ratings.	9
Table 5	Average Monthly Climate Summary	.13
Table 6	Fuel Models in the District	.15
Table 7	Average and Severe Case Fire Weather and Fuel Moisture Conditions	.23
Table 8	BehavePlus Predictions of Fire Behavior on 20% Slope	24
Table 9	Action Items	27
Table 10	Community Defensible Space Implementation Schedule	31
Table 11	Forest Treatment Methods	.34
Table 12	CWPP Monitoring and Evaluation Tasks	.41

# LIST OF APPENDICIES

Appendix A	Maps
Appendix B	Fire Behavior Fuel Models
Appendix C	Community Hazard Assessments and Action Item Recommendations
Appendix D	Community Survey and Responses
Appendix E	Fuelbreak Guidelines for Forested Subdivisions and Communities
Appendix F	Creating Wildfire Defensible Zones
Appendix G	Prescribed Fire Pile Burning Guidelines
Appendix H	Structure Triage Tag

# LIST OF MAPS

Map 1	Community Base Map
Map 2	Significant Past Fires
Map 3	Land Management Areas and Landowner/Agency
Map 4	Land Management Areas; Treatment Status
Map 5	Slope Percent
Map 6	Elevation
Map 7	Fuel Models
Map 8	Fire Regime Condition Class

# LIST OF ACROYNMS AND ABBREVIATIONS

AFOP Annual Fire Operating Plan
BLM Bureau of Land Management

BTU British Thermal Unit

CAPCD Colorado Air Pollution Control Division

CDPHE Colorado Department of Public Health and Environment

CSFS Colorado State Forest Service

CWPP Community Wildfire Protection Plans

ERC Energy Release Component FBFM Fire Behavior Fuel Model

FEMA Federal Emergency Management Agency

NFFPD North Fork Fire Protection District

FPD Fire Protection District

GIS Geographical Information System HFRA Healthy Forests Restoration Act

HOA Homeowners Association ICT Incident Command Team IMT Incident Management Team

JFDRS Jefferson County Fire Danger Rating System

JEFFCO Jefferson County mph miles per hour

NAIP National Agricultural Imagery Program
NEPA National Environmental Protection Act
NFDRS National Fire Danger Rating System
NFPA National Fire Protection Association
NWCG National Wildfire Coordinating Group
RAWS Remote Access Weather Station

USFS US Forest Service WFU Wildland Fire Use

WUI Wildland-Urban Interface

# **GLOSSARY OF FIRE BEHAVIOR TERMS**

**Aerial Fuels** All live and dead vegetation in the forest canopy or above surface

fuels, including tree branches, twigs and cones, snags, moss, and

high brush.

**Aspect** Direction toward which a slope faces.

**Direct Attack** A method of fire suppression where actions are taken directly along

the fire's edge. In direct attack, burning fuel is treated directly, such as by wetting, smothering, or chemically quenching the fire or by

physically separating burning from unburned fuel.

**Chain** A unit of linear measurement equal to 66 feet.

**Crown Fire** The movement of fire through the crowns of trees or shrubs more or

less independently of the surface fire.

**Dead Fuels** Fuels with no living tissue in which moisture content is governed

almost entirely by atmospheric moisture (relative humidity and

precipitation), dry-bulb temperature, and solar radiation.

**Defensible Space** An area around a structure, either natural or manmade, where

material capable of causing a fire to spread has been treated, cleared, reduced, or changed to act as a barrier between an advancing wildland fire and the loss to life, property, or resources. In practice, "defensible space" is defined as an area at least 30 feet around a

structure that is cleared of flammable brush or vegetation.

**Fire Behavior** The manner in which a fire reacts to the influences of fuel, weather,

and topography.

**Fire Danger** The broad-scale condition of fuels as influenced by environmental

factors.

**Fire Front** The part of a fire within which continuous flaming combustion is

taking place. Unless otherwise specified, the fire front is assumed to be the leading edge of the fire perimeter. In ground fires, the fire

front may be mainly smoldering combustion.

**Fire Hazard** The presence of ignitable fuel coupled with the influences of terrain

and weather.

**Fire Intensity** A general term relating to the heat energy released by a fire.

Fire Return Interval The historic frequency that fire burns in a particular area or fuel type, without human intervention.

Fire Regime

The characterization of fire's role in a particular ecosystem, usually characteristic of particular vegetation, elevation, and climate, and typically a combination of fire return interval and fire intensity (i.e., high frequency low intensity/low frequency high intensity).

Fire Risk

The probability that wildfire will start from natural or human-caused ignitions

Fire Weather

Weather conditions that influence fire ignition, behavior and suppression.

Flaming Front

The zone of a moving fire where combustion is primarily flaming. Behind this flaming zone combustion is primarily glowing. Light fuels typically have a shallow flaming front, whereas heavy fuels have a deeper front.

Fuel

Combustible material; includes, vegetation, such as grass, leaves, ground litter, plants, shrubs, and trees that feed a fire. Not all vegetation is acts as available fuel; deciduous vegetation such as aspen can serve as a barrier to fire spread, and many shrubs are only available as fuels when they are dead or drought-stressed.

**Fuel Loading** 

The amount of fuel present expressed quantitatively in terms of weight of fuel per unit area, usually as tons per acre.

Flame Length

The distance from the base to the tip of the flaming front. Flame length is directly correlated with fire intensity.

**Fuel Mitigation** 

Reducing and/or removing live and dead vegetation for the purpose of reducing the severity and/or spread of potential wildfires in those fuels. Sometimes also referred to as fuel management, fuel reduction, or fuel treatment.

Fuel Model

Simulated fuel complex (or combination of vegetation types) for which all fuel descriptors required for the solution of a mathematical rate of spread model have been specified.

**Fuel Type** 

An identifiable association of fuel elements of a distinctive plant species, form, size, arrangement, or other characteristics that will cause a predictable rate of fire spread or difficulty of control under specified weather conditions.

#### **Ground Fuel**

All combustible materials below the surface litter, including duff, tree or shrub roots, punchy wood, peat, and sawdust that normally support a glowing combustion without flame.

#### **Indirect attack**

A method of fire suppression where actions are taken some distance from the active edge of the fire due to intensity, terrain, or other factors that make direct attack difficult or undesirable.

#### **Intensity**

The level of heat radiated from the active flaming front of a fire, measured in BTUs (British Thermal Units) per foot.

#### **Ladder Fuels**

Fuels which provide vertical continuity between strata, thereby allowing fire to carry from surface fuels into the crowns of trees or shrubs with relative ease. They help initiate and assure the continuation of crowning.

#### **LANDFIRE**

Landscape Fire and Resource Management Planning Tools; an interagency vegetation, fire, and fuel characteristics mapping program, sponsored by the United States Department of the Interior (DOI) and the United States Department of Agriculture, Forest Service.

#### **Live Fuels**

Living plants, such as trees, grasses, and shrubs, in which the seasonal moisture content cycle is controlled largely by internal physiological mechanisms, rather than by external weather influences.

# National Fire Danger Rating System (NFDRS)

A uniform fire danger rating system that focuses on the environmental factors that control the moisture content of fuels.

#### **Prescribed Fire**

Any fire ignited by management actions under certain, predetermined conditions to meet specific objectives related to hazardous fuels or habitat improvement. A written, approved prescribed fire plan must exist, and National Environmental Protection Act (NEPA) requirements must be met, prior to ignition.

## Rate of Spread

The relative activity of a fire in extending its horizontal dimensions. It is expressed as a rate of increase of the total perimeter of the fire, as rate of forward spread of the fire front, or as rate of increase in area, depending on the intended use of the information. Usually it is expressed in chains or acres per hour for a specific period in the fire's history. Sometimes it is expressed as feet per minute; one chain per hour is equal to 1.1 feet per minute.

Risk

The probability that a fire will start from natural or human-caused ignition.

Shaded Fuel Break An area of forest where trees have been thinned to specific specifications, where some trees remain but thin enough to not contribute to fire spread. Shaded fuel breaks are often strategically placed for optimum benefit to values at risk (such as homes, critical infrastructure, or natural resources)

**Surface Fuels** 

Loose surface litter on the soil surface, normally consisting of fallen leaves or needles, twigs, bark, cones, and small branches that have not yet decayed enough to lose their identity; also grasses, forbs, low and medium shrubs, tree seedlings, heavier branchwood, downed logs, and stumps interspersed with or partially replacing the litter.

**Topography** 

Also referred to as "terrain." The physical parameters of the "lay of the land" that influence fire behavior and spread. Key elements are slope (in percent), aspect (the direction a slope faces), elevation, and specific terrain features such as canyons, saddles, "chimneys," and chutes.

Wildland Fire

Any fire burning in wildland fuels, including prescribed fire, fire use, and wildfire.

Wildfire

A wildland fire that is unwanted and unplanned.

## **EXECUTIVE SUMMARY**

The Community Wildfire Protection Plan (CWPP) is a strategic plan that identifies specific wildland fire risks facing communities and neighborhoods and provides prioritized mitigation recommendations designed to reduce those risks. Once the CWPP is finalized and adopted, it is the responsibility of the community or neighborhood to move forward and implement the action items. This may require further planning at the project level, acquisition of funds, or simply motivating individual homeowners.

This CWPP is not a legal document. There is no legal requirement to implement the recommendations herein. However, treatments on private land may require compliance with county land use codes, building codes, and local covenants. Treatments on public lands will be carried out by appropriate agencies and may be subject to federal, state, and county policies and procedures, such as adherence to the Healthy Forest Restoration Act (HFRA) and National Environmental Protection Act (NEPA).

The HFRA of 2003 provides the impetus for local communities to engage in comprehensive forest and wildfire management planning as well as incentive for public land management agencies to consider CWPP treatment recommendations as they develop their own strategic management plans. The HFRA provides communities with a flexible set of assessment procedures and guidelines that facilitate a collaborative, standardized approach to identify wildfire risks and prioritize mitigation actions. The CWPP addresses such factors as:

- Stakeholder collaboration and engagement
- Risk assessment fuels, historical ignitions, infrastructure, structure ignitability, local resources, and firefighting capability
- Community fire hazard mapping
- Hazard reduction recommendations
- Suggested project prioritization

This CWPP provides wildfire hazard and risk assessments for neighborhoods and subdivisions identified as Wildland-Urban Interface (WUI) and Intermix zones within the NFFPD. WUI is defined as the area where development abuts undeveloped areas. Intermix areas are more sparsely populated and scattered throughout undeveloped areas, but still form cohesive, homogenous communities. Due to highly dispersed housing density and location combined with limited infrastructure adjacent to large and remote wildland areas, there is high potential for loss of life and property from wildfire. WUI and intermix delineations within the NFFPD focus on somewhat homogeneous communities that represent a common emergency response area with similar assets, risks, and hazards. This CWPP builds upon previous plans completed for the Lower North Fork and South Platte areas, which provide specific hazard assessments and recommendations for individual homes within those smaller assessment areas.

The North Fork Fire Protection District (NFFPD) is located at the southwestern edge of the greater Denver metropolitan area, in the Front Range Foothills of Colorado. The NFFPD serves approximately 280 square miles of primarily rural and exurban interface. The North Fork of the South Platte River curves through the area and feeds into Cheesman reservoir, a major water source for the city of Denver. In addition, the district has significant recreational resources and historic sites.

Decades of absence of fire and other natural disturbances coupled with years of persistent drought have resulted in dense and weakened timber stands in some areas. This has also negatively affected other vegetation types besides timber that are present within the district. Shrublands have grown dense and resulted in the accumulation of significant amounts of available hazardous surface fuels. In addition, woody species have encroached on areas that were historically characterized by more grass species, altering natural ecosystems. In some areas these ecosystems have gone unchecked by fire for more than a century. The net result is significant hazardous fuels across various vegetation types within the district and risk of higher than normal fire intensity. Although extensive fire hazard and fuels mitigation work has been completed over thousands of acres throughout the assessment area on lands owned by Denver Water Board and the Pike National Forest, there are still ample opportunities for individual landowners to extend and improve upon existing treatment areas and collaborate with these agencies for planned projects in the future.

Field surveys, public input, and collaboration with the NFFPD and other stakeholders were utilized for data collection, hazard assessments, and formation of treatment recommendations. Jefferson County Division of Emergency Management provides access to the full CWPP report for the public.

Public education, awareness and involvement are important components of any CWPP. Public meetings provide a means to share information about the assessment process and facilitate communication between the Core Team, stakeholders, and other interested parties and provide a collaborative forum through which hazards can be identified, discussed and prioritized. General receptiveness to mitigation recommendations may also be gauged. The first public meetings for the NFFPD were held on June 19, 2010 at the Deckers Community Center and the Buffalo Creek Community Center. The purpose of the first meeting was to introduce the CWPP process and overall project goals and objectives. The second meeting was held on August 27, 2010 at NFFPD Station 1. The purpose of the second meeting was to present the survey results and treatment recommendations and to solicit additional public and stakeholder input for the final report. A final meeting introducing the completed plan to the community will be held in the spring of 2011.

Questionnaires were distributed at both meetings in order to ascertain public opinion concerning the level of wildfire risk in the NFFPD, evaluate values at risk, and assess mitigation practices needed to reduce risk. Safety pamphlets and brochures explaining defensible space, shaded fuelbreaks, proper home construction, and landscaping practices designed to reduce the risk of wildfire loss were also distributed.

The National Fire Protection Association (NFPA) Form 1144, Standard for Protection of Life and Property from Wildfire 2002 Edition, was utilized to assess the level of risk and hazard to individual neighborhoods. Form 1144 provides a means to assess predominant characteristics within individual neighborhood communities as they relate to structural ignitability, fuels, topography, expected fire behavior, emergency response, and ultimately human safety and welfare. Scores are assigned to each element and totaled to determine the overall level of risk. Low, moderate, high, and extreme hazard categories are determined based on the total score. This methodology provides a standardized basis for wildfire hazard assessment and a baseline for future comparative surveys. Seven neighborhoods identified by the NFFPD as areas of concern were surveyed according to NFPA Form 1144 protocols during July of 2010. A summary of the community hazard ratings are provided in Table ES-1.

**Table ES-1. Community Hazard Ratings** 

Community	Hazard Rating	Numerical Rating*
North Rainbow Falls	High	101
Foxton/Longview	High	97
Platte River Road Corridor	High	92
Buffalo Creek	High	88
Pine Grove	High	78
Trumbull/Deckers	Moderate	65
Spring Creek	Moderate	62

<sup>\*</sup>Numerical rating based on calculations derived from the National Fire Protection Agency Standard for Reducing Structure Ignition Hazards from Wildland Fire (NFPA 1144). The complete forms and calculations are located in Appendix C.

In addition to the larger-scale treatments identified in this report, the most effective wildfire hazard reduction depends largely on the efforts of individual landowners making common sense modifications to their own homes and property. The creation of effective defensible space and the utilization of fire resistant construction materials will significantly reduce the risk of life and property loss in the event of a wildfire. When these common sense practices become the predominant model in a neighborhood the entire community benefits.

The predominant wildfire fuels in the NFFPD are pine forests with needle litter, herbaceous plants, and woody shrubs on the forest floor under the tree canopy (timber understory fuel models; see Appendix B). In neighborhood margins that interface with these habitats, effective hazard reduction can be as straight forward as establishing and maintaining a defensible space around the home, and reducing home ignitability. Other priority action items should include:

- Replacing wood shake roofs;
- Utilizing fire resistant building materials for remodels or new construction;
- Implement neighborhood improvement oversight committees; and,
- Fire prevention education.

Familiarization and coordination with the Jefferson County Annual Operating Plan is also recommended. This provides important information concerning county and regional fire operations, policies and procedure definitions. Information may be available through the through the Jefferson County Office of Emergency Management web site.

The following Table ES-2 summarizes the proposed mitigation project schedule for the NFFPD.

Table ES-2. Proposed Wildfire Mitigation Project Schedule

	Table ES-2. Proposed Wildfire Mitigation Project Schedule		
Year	Project	Actions	
	Annual spring outreach	Contact and organize homeowners Hold educational meeting about defensible space	
2011	Annual spring/summer mitigation	<ul> <li>Clean roofs and gutters</li> <li>Trim limbs and shrubs within 3 to 5 feet of home</li> <li>Rake and mow yard</li> <li>Assist neighbors</li> <li>Organize debris disposal</li> </ul>	
	Annual spring outreach	-Contact and organize homeowners	
2012	Annual spring/summer mitigation	<ul><li>Clean roofs and gutters</li><li>Rake and mow yard</li><li>Organize debris disposal</li></ul>	
		Contact and organize homeowners	
2013	Annual spring outreach	<ul> <li>Identify needed improvements to construction features throughout community</li> </ul>	
	Annual spring/summer mitigation	Where possible, coordinate projects between homeowner groups who have created defensible space and open space managed lands Repeat yard maintenance & debris disposal	
		Contact and organize homeowners  Follow up with landowners who have not completed	
	Annual spring outreach	defensible space, offer assistance	
2014	Annual spring/summer mitigation	Complete any outstanding projects from previous years  Begin long-term maintenance (as needed, re-trim shrubs, remove small trees, etc)  Initiate construction feature improvements	

The CWPP development process facilitates collaboration among community-based organizations, fire protection authorities, local governments, public land management agencies, and private landowners to identify and prioritize measures to reduce wildfire risk. Maintaining the momentum created by this process is critical to successful implementation and ongoing community wildfire hazard reduction. Ownership of this responsibility lies with each community, neighborhood, and homeowner association identified in the CWPP.

# NORTH FORK FIRE PROTECTION DISTRICT COMMUNITY WILDFIRE PROTECTION PLAN

# 1 INTRODUCTION

# 1.1 CWPP Purpose

Dramatic natural and human-caused changes to forested areas occurred throughout the 20<sup>th</sup> century. In many cases, these changes led to a high accumulation of naturally occurring flammable forest fuels. Decades of fire suppression and fire exclusion in fire-adapted ecosystems have removed a critical natural process from the vegetation regeneration cycle. In addition, years of persistent drought have resulted in a weakened forest infrastructure and regional epidemics of disease and insect infestation. At the same time, demographic trends continue to shift the nation's population growth centers to western and southwestern states where fire-adapted forest ecosystems are predominant, resulting in fragmented forested landscapes. The region where human development is pushing into previously undeveloped expanses of wildland is known as the wildland-urban interface (WUI). This is the area where risk of loss to life and property due to wildfire is the greatest. The potential consequences of severe wildfires are devastating and costly, and in recent years spurred Congress to pursue an effective solution.

Precipitated by over a decade of increasing wildfire activity, related losses, and spiraling suppression costs, the National Fire Plan was developed by the federal government in 2000. The Healthy Forests Restoration Act (HFRA) of 2003 provides the impetus for wildfire risk assessment and planning at the county and community level and helps implement the core components of the plan. HFRA refers to this level of planning as the Community Wildfire Protection Plan (CWPP). This empowers the participating community to take advantage of wildland fire and hazardous fuel mitigation opportunities offered under HFRA legislation including a framework for hazard evaluation and strategic planning, prioritized access to federal grant funding supporting identified hazard reduction projects, and a basis for collaboration with local, state, and federal land management agencies.

The CWPP is a strategic plan that identifies specific wildland fire risks facing communities and neighborhoods and provides prioritized mitigation recommendations that are designed to reduce those risks. Once the CWPP is adopted, it is the community's responsibility to move forward and implement the action items. This may require further planning at the project level, acquisition of funds, and motivating individual home owners. This CWPP is not a legal document. There is no legal requirement to implement the recommendations herein. Actions on public lands can be subject to federal, state, and county policies and procedures such as adherence to the HFRA and National Environmental Protection Act (NEPA). Action on private land may require compliance with county land use codes, building codes, and local covenants.

#### 1.2 North Fork Fire Protection District's need for a CWPP

The North Fork Protection District (NFFPD) is located southwest of the greater Denver, Colorado metropolitan area (Map 1, Appendix A). Although the Pike National Forest covers about 100 square miles of NFFPD and is more sparsely populated than the other fire protection districts in Jefferson County, several communities here occur in the wildland-urban interface (WUI) and Intermix. According to the Federal Register, Interface is defined as a community that directly abuts wildland fuels. Intermix communities exist where structures are scattered throughout a wildland area. Both interface and intermix require fire hazard mitigation.

As is typical of Colorado Front Range WUI zones, neighborhoods often extend into foothill valleys, canyons, and mountain slopes with restricted access and limited emergency water supplies. Lacking the existence of a formal municipality or commercial center, the district is characterized by small exurban and rural communities and unaffiliated clusters of homes with a common single ingress/egress. They are common examples of the WUI and each presents emergency responders with unique, identifiable, and addressable hazards and risks. Outlying ranches, homesteads, and individual homes are not addressed by the CWPP process and are best served through individual home hazard and risk assessments. However, improvements to home ignition zones and defensible space apply to all properties, including those not within the delineated community areas.

A particularly important value at risk in this district is the Upper Platte Watershed, which has suffered from severe erosion and sedimentation following past fire events, and could be further compromised by severe fires The Watershed encompasses approximately 1,000 square miles and supplies the Denver metropolitan area with 80 percent of its water. It is well known for its vast recreation opportunities. Cheesman and Strontia Springs Reservoirs, major water sources for the Denver area are also located in NFFPD.

As a result of the 1996 Buffalo Creek Fire post-fire erosion damage the Upper South Platte Watershed Protection and Restoration Project was developed. In 1998, the Colorado State Forest Service (CSFS), Denver Water, US Forest Service (USFS), Rocky Mountain Forest and Range Experiment Station, Environmental Protection Agency, US Geological Survey, Natural Resource Conservation Service, and Coalition for the Upper South Platte formed a steering committee to address forest health issues within the watershed. The US Fish & Wildlife Service became involved during the biological opinion process. The steering committee was dedicated to demonstrating the effectiveness of landscape-scale forest protection and restoration practices. These practices reduce the likelihood of catastrophic wildfires and their associated risks to human life, property, water quality and availability, and air quality.

The group facilitated a landscape scale assessment of 650,000 acres within the watershed to determine high-priority areas for restoration work. Work began on the project in 1999 and continues to this day. Over 25,000 acres have been treated on USFS, Denver Water, State, and private lands within the project area with additional treatments planned.

The district occupies the montane zone, which extends between the grasslands and shrublands of the lower elevations to sub-alpine forests at higher elevations. Much of this region is a fire-dependent ecosystem that historically experienced frequent natural ignitions that maintained an open stand structure and diverse vegetation composition. Natural resource management policies and changing ecological conditions have interacted in ways that resulted in hazardous fuel conditions throughout the district. Continuous rapid expansion of the WUI, coupled with the accumulation of hazardous fuels in a fire-prone region suffering from prolonged drought has set the stage for catastrophic wildfires with significant risk to life and property. Steep topography and narrow dead end roads complicate an already potentially catastrophic scenario. NFFPD has experienced several large fire events in recent history in parts of its district, including the 138,114-acre Hayman Fire in 2002, the 10,761-acre Hi Meadow Fire in 2000, and the 11,853-acre Buffalo Creek Fire in 1996. However, much of NFFPD is still heavily forested and high accumulations of hazardous fuels occur in and near many of the communities in the area.

To date, there have been two CWPP that address USFS, Denver Water, Jefferson County Open Space, and private lands that fall within and/or near the NFFPD, namely, the South Platte CWPP (2004) and the Lower North Fork CWPP (2007). Treatments in both plans primarily focused on USFS and Denver Water lands as they are the major landowners in the area. Approximately 50% of the treatments have been implemented in both plans. Although the existing plans provide thorough hazard assessments and action plans for the areas they cover, there has not been one plan that covers the entire NFFPD.

This document will encompass all WUI and rural intermix communities that lie within the FPD, some of which had not been previously assessed, making them eligible and competitive for federal fuels mitigation grants. In addition, this plan's recommendations are meant to apply to occluded properties that lie outside both the WUI and intermix boundaries.

The CWPP and its development process can be a significant educational tool for people who are interested in improving the environment in and around their homes. It provides a coordinated assessment of neighborhood wildfire risks and hazards. Fire *risk* is the probability that wildfire will start from natural or human-caused ignitions. Fire *hazard* is the presence of ignitable fuel coupled with the influences of topography and weather, and is directly related to fire behavior. Fire severity, on the other hand, refers to the immediate effect a fire has on vegetation and soils. This CWPP addresses fire hazard and makes recommendations to reduce wildfire hazard in the NFFPD in order to make it a safer place to live, work, and play.

#### 1.3 CWPP Process

The HRFA designed the CWPP to be a flexible process that can accommodate a wide variety of community needs. This CWPP is tailored to meet specific goals as identified by the Core Team, following the standardized steps for developing a CWPP as outlined in "Preparing a Community Wildfire Protection Plan, A Handbook for Wildland-Urban Interface Communities" (Society of American Foresters 2004) and the Colorado State

Forest Service Minimum Standards for Community Wildfire Protection Plans (CSFS 2009), and as outlined in Table 1.

**Table 1. CWPP Development Process** 

Step	Task	Explanation
One	Convene Decision Makers	Form a Core Team made up of representatives from local governments, fire authorities, and Colorado State Forest Service (CSFS).
Two	Involve Federal Agencies	Engage local representatives of the U.S. Forest Service (USFS) and other land management agencies as appropriate.
Three	Engage Interested Parties	Contact and encourage participation from a broad range of interested organizations and stakeholders.
Four	Establish a Community Base Map	Develop a base map of the district that provides a better understanding of communities, critical infrastructure, and forest/open space at risk.
Five	Develop a Community Risk Assessment	Develop a risk assessment that considers fuel hazards, community and commercial infrastructure, resources, and preparedness capability. Rate the level of risk and incorporate into the base map as appropriate.
Six	Establish Community Priorities and Recommendations	Use the risk assessment and base map to facilitate a collaborative public discussion that prioritizes fuel treatments and nonfuel mitigation practices to reduce fire risk and structural ignitability.
Seven	Develop an Action Plan and Assessment Strategy	Develop a detailed implementation strategy and a monitoring plan that will ensure long-term success.
Eight	Finalize the CWPP	Finalize the district CWPP and communicate the results to interested parties and stakeholders.

The Core Team (Table 2) consists of representatives from local government, local fire authorities, and the CSFS. In addition, the Core Team includes relevant land management agencies and active community and homeowner association (HOA) stakeholders. Together these entities guide the development of the CWPP as described in the HFRA and must mutually agree on the plan's final contents. Collaboration between agencies and communities is an important CWPP component because it promotes sharing of perspectives, priorities, and other information that are useful to the planning process. The NFFPD CWPP was concurrently developed with the Douglas County CWPP, so several Core Team members for this plan also served on the Douglas County CWPP Core Team. This allowed a collaborative effort between the two Core Teams, with the County CWPP Core Team providing important technical guidance in the creation of this plan.

Table 2. NFFPD CWPP Core Team Members and Affiliations

Team Member	Organization
Curt Rogers	North Fork Fire Chief
Rocco Snart	Jefferson County Emergency Management
Allen Gallamore	Colorado State Forest Service
Kristin Garrison	Colorado State Forest Service, Denver Water Representative
Matt Schweich	U.S.Forest Service, Pike National Forest
Larry Means	Pine Grove Resident
Robin Keith	Jefferson Conservation District
Jill Alexander	Douglas County Wildfire Mitigation Specialist
Josh Keown	Douglas County Wildfire Mitigation Specialist

The next step is to engage other interested parties and stakeholders through public meetings and community outreach. For the NFFPD CWPP, public meetings were held and a community survey was distributed and posted online. This feedback ensured that the Core Team was adequately addressing fire mitigation questions and concerns unique to the communities in the area.

In step four, geographical information system (GIS) data is used to develop a community base map. The community base map identifies and delineates communities at a scale relevant to the NFFPD. The WUI and Intermix boundaries are meant to encompass a relatively uniform landscape and fuel structure for which a representative hazard rating can be applied. In this CWPP, WUI and Intermix zones were delineated based on overall community homogeneity and population density, which was determined with GIS data layers including topography, vegetation cover, and address points.

Once the community base map is established, a comprehensive risk assessment is conducted at the neighborhood or community level in order to determine relative levels of wildfire risk to better address hazard treatment prioritization. A standardized survey methodology is utilized in order to create an addressable rating benchmark for comparative future assessments and project evaluations.

CWPP fuel treatment recommendations are derived from the risk assessment. In addition, actions recommended in the Lower North Fork and South Platte plans and completed and planned treatment areas addressed by the USFS, CSFS, and Denver Water were also examined and, where applicable, incorporated into this CWPP. Mitigation recommendations are prioritized through an open and collaborative effort with the Core Team and stakeholders. Prioritized treatments target wildfire hazard reduction in these WUI communities and neighborhoods, including reducing structural ignitability and protecting critical supporting infrastructure. An action plan guides treatment implementation for high priority projects over the span of several years.

The finalized CWPP represents a strategic plan with Core Team consensus that provides prioritized wildfire hazard reduction treatment projects, preferred treatment methods, a base map of the WUI, defensible space recommendations, and other information relevant to the scope of the project.

There are several federal legislative acts that set policy and provide guidance to the development of the CWPP for the NFFPD:

- Healthy Forests Restoration Act (HFRA) (2003) Federal legislation to promote healthy forest and open space management, hazardous fuels reduction on federal land, community wildfire protection planning, and biomass energy production.
- National Fire Plan and 10-year Comprehensive Strategy (2001) Interagency plan that focuses on firefighting coordination, firefighter safety, post-fire rehabilitation, hazardous fuels reduction, community assistance, and accountability.
- Federal Emergency Management Agency (FEMA) Disaster Mitigation Act (2000) provides criteria for state and local multiple-hazard and mitigation planning.

There are also several sources of information that supports wildfire mitigation and response that provide guidance to the development of the CWPP for the NFFPD:

- The CSFS is a valuable resource that provides education and guidance to communities and individual landowners concerned with the threat of wildfire, as well as forest resource management in the WUI (http://csfs.colostate.edu/).
- The Jefferson County Annual Operation Plan (AOP) provides an intergovernmental mutual aid agreement between all fire districts in the county, including the CSFS and USFS. This pre-plan provides emergency response infrastructure for any large incident support.
- The Douglas County Annual Operation Plan (AOP)
- The Lower North Fork CWPP
   (http://csfs.colostate.edu/pages/documents/LowerNorthForkCWPP.pdf)
- The South Platte CWPP
   (http://csfs.colostate.edu/pages/documents/southplatteCWPP.pdf)

# 1.4 NFFPD CWPP Goals and Objectives

Table 3 provides a brief summary of the primary goals and objectives for the CWPP process.

Table 3. NFFPD CWPP Goals and Objectives

Goals Objectives		
Godis	Conduct a district-wide wildfire risk assessment.	
Conduct a wildfire risk	Identify areas at risk and contributing factors.	
assessment	Determine the level of risk to structures that wildfires and contributing factors pose.	
	Identify and prioritize hazardous fuel treatment projects.	
Develop a mitigation plan	Identify and prioritize non-fuels mitigation needs.	
Manage hazardous	Identify communities at highest risk and prioritize hazard reduction treatments.	
fuels	Develop sustainable initiatives at the homeowner HOA level.	
	<ul> <li>Secure funding and assist project implementation.</li> </ul>	
Facilitate emergency  - Develop strategies to strengthen emergency management, responsible to the strategies for wildfire.		
planning	Build relationships among county government, fire authorities, and communities.	
Facilitate public	<ul> <li>Develop strategies to increase citizen awareness and action for Firewise practices.</li> </ul>	
outreach	<ul> <li>Promote public outreach and cooperation for all fuels reduction projects to solicit community involvement and private landowner cooperation.</li> </ul>	

As a strategic plan, the real success of any CWPP hinges on effective and long-term implementation of the identified objectives. The public outreach phase of the CWPP development process includes efforts to identify stakeholder groups that can serve as an implementation team, which oversees the execution of prioritized recommendations and maintains the plan as the characteristics of the WUI change over time. Specific projects may be undertaken by individual homeowner associations, while larger scale treatments may require collaboration between multiple homeowner associations, local government, and public land management agencies. Original CWPP Core Team representatives may, but are not required to assist in the implementation of the CWPP action plan. Overall, however, the key to the success of CWPP implementation is community participation. Continued public meetings are recommended as a means to generate additional support and maintain momentum.

# 2 WILDLAND FIRE MANAGEMENT OVERVIEW

# 2.1 Wildland Fire Types and Classification

There are two types of fires that burn in wildland fuels: prescribed fire and wildfire. Prescribed fires are planned fires ignited by land managers to accomplish specific natural resource management objectives. Wildfires are unplanned fires that result from natural ignition, human-caused fire, or escaped prescribed fire. Under certain circumstances wildfires can be managed with minimum suppression to achieve multiple objectives, including resource benefits.

Wildland fires are also classified by how they burn in various fuels. *Ground fire* refers to burning/smoldering materials beneath the surface including duff, roots, decomposing wood, peat, and sawdust that normally support a glowing combustion without flame. *Surface fire* refers to loose fuels burning on the surface of the ground, which includes leaves, needles, small branches, as well as grasses, forbs, low and medium shrubs, tree seedlings, fallen branches, downed timber and slash. Depending on the type of surface fuel, surface fires can range from small and slow-moving to intense, fast-moving, and/or prolonged fires. *Passive crown fire* encompasses a wide range of crown fire behavior, from occasional torching of isolated trees or groups of trees to nearly active crown fire. Passive crown fire is often referred to simply as "torching". Torching occurs when the vegetation that spans the gap between the forest floor and tree crowns (ladder fuel) allows a surface fire to travel vertically into flammable tree crowns. *Active crown fire* is a wildland fire that moves rapidly through the crowns of trees or shrubs independently of a surface fire. Active crown fires are intense, destructive, and difficult to suppress.

Wildland fuels comprise both dead and live vegetation, and are described in terms of density, bed depth, continuity, vertical arrangement, and moisture content. For fire to ignite and spread, wildland fuels must meet the conditions of combustion (sufficient heat and oxygen). If the potential fuel does not meet the conditions of combustion, it will not ignite. Conditions of combustion can vary widely across geographic region and among different fuels in an area. This explains why some trees, patches of vegetation or structures may survive a wildland fire and others in the near vicinity are completely burned.

## 2.2 Wildland Fire Behavior

Fire behavior is a description of the manner in which a fire reacts to the combined influences of fuel, weather and topography. Fire behavior is observed and assessed at the flaming front of the fire and described most simply in terms of fire intensity (in feet of flame length) and in rate of forward spread (Table 4). The implications of observed or expected fire behavior are essential components of suppression strategies and tactics, particularly in terms of the difficulty of control and effectiveness of various suppression resources.

Table 4. Fire Behavior Ratings

Adjective class	Rate of Spread (ch/hr)*	Flame Length (ft)
Very Low	0 - 2	0 - 1
Low	2 - 5	1 - 4
Moderate	5 - 20	4 - 8
High	20 - 50	8 - 12
Very High	50 - 150	12 - 25
Extreme	> 150	> 25

Stubbs T., 2005, Adjective Ratings for Fire Behavior

Potential surface fire behavior may be predicted by classifying vegetation in terms of fire behavior fuel models (FBFM) and using established mathematical models to predict potential fire behavior under specific climatic conditions. In this CWPP, FBFMs were obtained from existing GIS and vegetation data layers of the NFFPD.

In general, fire burns more rapidly and intensely up slopes. Additionally, topographic features such as narrow drainages and box canyons can funnel warm air upslope, further intensifying fire behavior. However, wind tends to be the most significant factor in the most extreme and destructive fires, driving active crown fires and causing long-range spotting ahead of the main fire front. Strong winds common along the Front Range can override topographic effects on fire behavior, even causing wildfire to be driven rapidly down slope.

# 2.3 History of Wildfire

Lightning-caused fire is a natural component of Front Range ecosystems, and its occurrence is important to maintaining the health of forest and open space ecosystems. Native Americans used fire as a tool for hunting, improving wildlife habitat and land clearing. For example, ponderosa pine woodlands of the montane zone and lower elevation brushlands and grasslands historically experienced relatively frequent fire return intervals. Extensive research has been conducted in Front Range forests in the assessment area. Fire history reconstruction in ponderosa pine forests in the vicinity of Cheesman Reservoir shows evidence that fire occurred in the area every 20 to 50 years between 1531 and 1880 (Huckaby *et al.* 2001). As such, many of the plant species and communities are adapted to recurring fire through phenological, physiological, or anatomical attributes. In addition, the reproduction and persistence of some plant species, such as lodgepole pine and western wheatgrass, require reoccurring fire.

Beginning in the 19<sup>th</sup> century, Euro-American settlers in western North America altered the natural fire regime in several interrelated ways. The nature of vegetation (fuel) changed because of land use practices such as homesteading, livestock grazing, agriculture, water development, and road construction. Livestock grazing reduced the amount of fine fuels such as grasses and forbs, which carried low-intensity fire across the landscape. Continuous stretches of forest and open space fuels were broken up by land-clearing activities. Additionally, with the significant reduction of naturally occurring fire

<sup>\*</sup>ch/hr = chains per hour, where 1 chain = 66 feet; this standard measurement of rate of spread is approximately the same as feet per minute, where 1 chain per hour ~ 1 foot per minute

after 1880, there has been widespread establishment and persistence of trees since 1880, leading to denser forest stands that can carry more intense, severe wildfires.

Although advances in scientific knowledge and land management techniques have improved the way wildland fire is managed in recent years, land managers and firefighters are faced with many challenges when fires burn in the WUI. Present-day land use changes, particularly residential development, have continued to impact wildland ecosystems and hazardous fuel distribution. Since the 1970's, housing growth within 1-km of national forests and other protected areas has outpaced the rate of growth in urban areas (Radeloff *et al.* 2010). Increasing population density in the WUI makes wildfires more complex and potentially dangerous for firefighters and the general public.

# 2.4 Fuels Management

Heavy wildland fuel loading and continuity has created hazardous situations for public safety and fire management, especially when found in proximity to communities. These hazardous conditions require an array of mitigation tools, including prescribed fire and mechanical thinning treatments to protect human life, economic values, and ecological values. Objectives of fuels management include (but are not limited to) reducing surface fire intensity, reducing the likelihood of crown fire initiation and spread, and improving forest health. These objectives may be accomplished by various methods of reducing surface fuels and ladder fuels, thinning trees to decrease crown density, and/or retaining larger fire resistant trees. By breaking up vertical and horizontal fuel continuity in a strategic manner, firefighters and other suppression resources are afforded better opportunities to control fire rate of spread and contain wildfires before they become catastrophic.

Prescribed fire is commonly used as a resource management tool under carefully planned conditions by many land management agencies. It includes completing a detailed burn plan with burn parameters (prescriptions), pre-treatment of the fuel load, close monitoring of weather, and use of specific ignition patterns to achieve desired results. When implemented correctly, prescribed fire can improve wildlife habitat, help abate invasive vegetation, reduce excess fuel loads, and lower the severity of future wildfires in the treatment area. Prescribed fires are ignited only under favorable weather conditions, and must meet air quality requirements of the Colorado Department of Public Health and Environment (CDPHE) Air Pollution Control Division (CAPCD) in order to ensure the safety of firefighters and the public. Prescribed fires may be conducted either in a defined area as a broadcast burn, or in localized burn piles. Broadcast burns are used to mimic naturally occurring wildfire within pre-prepared control lines by highly trained fire personnel. Burn piles are utilized to dispose of excess woody material after thinning if other means of disposal are not available or cost-prohibitive. Pile burns do not necessarily need to be conducted by trained professionals, but are subject to local permitting and air quality control guidelines. Acceptable burn days are determined by county government, and are usually limited to high moisture or snowy conditions.

Mechanical thinning is another management tool that can be used to break up fuel continuity in order to reduce fire intensity and spread. This can be accomplished in a variety of ways, but most commonly with chainsaws and/or masticators. Chainsaws and other hand tools have been traditionally used to mitigate fuels on a smaller scale because it is time-and labor-intensive, but affords the most controlled results. Once the forest is thinned, the slash and wood must be removed from the forest, chipped onto the forest floor, or piled and burned. In some cases, slash can be "lopped and scattered", but this can have a negative impact on fire hazard if too much woody debris is left after thinning. Slash removal can be the most costly and time-intensive phase of forest thinning by chainsaws and hand tools. Therefore, masticators have become a widely used management tool in recent years. A masticator head is mounted on a skid steer or tractor and shreds forest fuels, including whole trees, then leaves the shredded/chipped material on the forest floor. Mastication of fuels does not reduce the amount of fuels in a forest stand, but redistributes it in a manner in which it does not contribute to crown fire initiation and spread. Although limited to machine-operable terrain (slopes less than 40%, not rocky, etc.), this method of thinning is generally quicker and more costeffective than hand-thinning with chainsaws, and large-scale fuel treatments can be completed in a relatively short time.

Land managers often use a combination of these fuel mitigation techniques to achieve management objectives, depending on the vegetation type, terrain, adjacent private lands, or other values at risk. Private landowners should also consider these factors when choosing fuel mitigation tools. Additionally, landowners can improve the effectiveness of their own fuel mitigation treatments by using a combination of tools and using adjacent fuel treatments to their advantage. This topic is discussed in more detail in the action item recommendations.

# 3 NORTH FORK FIRE PROTECTION DISTRICT PROFILE

# 3.1 County Setting and Assessment Area

The NFFPD is located west and south of Denver, and comprises approximately 300 square miles, covering the southern third of Jefferson County and a small portion of Douglas County.

Jefferson County, which contains most of the FPD, was established in 1861 as one of the original 17 counties created by the Colorado Territorial Legislature with a land base of 774 square miles. The county has the fourth largest population in the state, currently estimated at 545,290 people with approximately 190,440 people living in the incorporated areas. The southeast corner of the fire protection district lies in Douglas County, south of the Denver Metro area, and follows the Upper South Platte River. The NFFPD portion of Douglas County is rural and relatively sparsely populated. Douglas County has a population about half that of Jefferson County, but is one of the fastest-growing counties in Colorado, continually expanding the WUI.

Land ownership is distributed among Denver Water and private parcels along the South Platte River, along with scattered private parcels in the upper slopes of the communities. The area is generally bounded by the Pike National Forest to the west and south and Jefferson County Open Space and private land to the north.

The local economy is dictated by the proximity and ease of access to the business and employment opportunities in the nearby Denver metro area. Most working residents commute daily to Denver, but several local businesses and tourism are economically important to the area. Numerous getaways on nearby county, state, federal and private lands with world-class hunting, climbing, cycling, camping, and fishing areas abound locally.

The assessment area for this CWPP is defined by the boundaries of the NFFPD. Using GIS data, communities were delineated and designated as WUI or Intermix. Interface (WUI) communities are those with greater than 30 homes in a fairly homogeneous area. Intermix communities are fairly homogeneous, but more sparsely populated communities. In this CWPP, intermix zones also encompass the more sparsely populated areas on the margins of WUI areas. This ensured that communities that would not be considered "WUI" by some definitions could be incorporated into the CWPP. The core team identified seven WUI and Intermix areas based on population distribution, infrastructure, and emergency response. Each community represents a specific response area with unique characteristics and identifiable hazards and risks. The remainder of the district is characterized by larger parcel sizes and lower structural density and would be more accurately assessed using individual home hazard and risk surveys, which are outside the scope of this CWPP.

#### 3.2 Climate

The climate of the area is relatively dry with the majority of precipitation occurring in the spring months and late summer monsoons. However, with over 4,000 feet of vertical relief within the district, average conditions vary greatly from one location to another. In the summer months, thunderstorms can occur almost daily and can produce hundreds of lightning strikes in a single storm. The area receives over 240 days of sunshine per year and an average of 16 inches of annual precipitation. Winter high temperatures are typically in the mid 40s and summer highs tend to remain in the 80s. The low precipitation months are December, January, and February. Seasonal weather patterns over the region and topographic effects from the continental divide can generate high winds year-round. It is not uncommon for this area to experience winds in excess of 50 miles per hour. These conditions are optimum for wildfire ignition and spread. As the climate has warmed and dried over the past century, it is now possible for wildfires to occur 12 months a year in the NFFPD.

Table 5. Average Monthly Climate Summary for NFFPD, Cheesman Climate Station

	Month												
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
Average max temp (°F)	45	47	51.1	58.2	67.3	78.2	83.4	81.5	75.4	65.3	53.4	46	62.7
Average min temp (°F)	10.2	11.8	18.7	26.5	34.8	43.3	48.7	47.1	39.5	29.3	19.8	12.6	28.5
Average total precipitation (inches)	0.39	0.56	1.13	1.8	1.85	1.56	2.62	2.5	1.25	1.04	0.68	0.57	15.94
Average snowfall (inches)	5.6	7.3	11.2	10	2.1	0.2	0	0	1.3	4.4	7.2	7.3	56.6

Data obtained from the High Plains Regional Climate Center (http://hprcc.unl.edu).

# 3.3 Topography

Topography refers to the steepness of slope (expressed in percent or degrees) and aspect (expressed as direction the slope faces). The elevation of the FFPD ranges from 6,000 to 8,200 ft with most of the homes above 7,000 ft. The entire district is comprised of mountainous terrain with slopes ranging from 10 percent to over 50 percent slope. Most homes are in areas exposed to slopes of 20 percent or steeper. Although most of the homes in the WUI and Intermix are on slopes that are less than 30%, almost all of the homes are within 300 feet of steeper slopes. Not only does this affect potentially severe fire behavior, it can limit the type and extent of fuel mitigation that can take place near homes that need it. For example, mechanical fuels reduction with masticators is generally limited to slopes less than 50%, on average. Mitigation with chainsaws is the most feasible method for steep slopes, but in general, the more difficult the terrain is, the more costly and dangerous the work is. Therefore, slopes exceeding 40% are usually omitted from implementation plans in favor of more cost-effective areas on easier terrain.

In this CWPP, topography was assessed with a digital elevation model (DEM) in GIS. Both topography and elevation play an important role in dictating existing vegetation

and, therefore, fuels and fire behavior. The steep slopes, canyons, draws, and ravines throughout the area channel winds and contribute to severe fire behavior. Topography also dictates community infrastructure design, further influencing overall hazard and risk factors.

# 3.4 Wildland Vegetation and Fuels of the Assessment Area

The vegetation in the district is typical of the Rocky Mountain Montane zone, which ranges from 5,600 to 9,500 feet. The dominant tree species throughout the assessment area are ponderosa pine (*Pinus ponderosa*) and Douglas-fir (*Pseudotsuga menziesii*). The distribution and density of vegetation species are driven primarily by available soil moisture, which is closely related to elevation and slope aspect. This variability is known as the topographic-moisture gradient (Whittaker 1967), one of the key concepts in forest science. At lower elevations, drier sites that limit tree growth, and recently burned areas, vegetation types include dry grass and shrublands. Gambel oak (*Quercus gambelii*) is the dominant species, with mountain mahogany (*Cercocarpus montanus*) occasionally co-dominant. Common species of grass in this area include prairie Junegrass (*Koeleria macrantha*), blue grama (*Bouteola gracilis*), western wheatgrass (*Pascopyrum smithii*), little bluestem (*Schizachyrium scoparium*), Timothy (*Phleum pretense*), and cheatgrass (*Bromus tectorum*).

As elevation and moisture availability increase, ponderosa pine (*Pinus ponderosa*) and mixed conifer woodlands with herbaceous and shrub understory are common. Northfacing slopes throughout the district are characterized by denser stands of ponderosa and mixed conifer forests dominated by Douglas-fir (*Pseudotsuga menziesii*). In the upper montane zone, lodgepole pine (*Pinus contorta*) is prevalent. Quaking aspen (*Populus tremuloides*) occurs intermittently where micro-site conditions provide enough moisture for them to thrive in either persistent or seral stands.

Deciduous riparian zones along rivers and creek beds are present throughout the area, with occasional stands of cottonwood (*Populus* spp.) and willow (*Salix* spp.). The vegetation in these riparian zones are generally not significant carriers of fire, and therefore do not usually require extensive mitigation.

The type of vegetation coupled with disturbance regimes determines the amount and distribution of wildland fuels. For example, dead and down timber and needle litter can be heavy in timber stands and woodlands where disturbance has been absent for many decades. Conversely, grasslands and that lack woody species and can burn more frequently have very low fuel loads. Predicting the potential behavior and effects of wildland fire in different fuels is an essential task in fire management. Mathematical surface fire behavior models and prediction systems are driven in part by fuelbed inputs such as load, bulk density, fuel particle size, heat content, and moisture of extinction.

To facilitate use in models and systems, fuel inputs have been formulated into fire behavior fuel models (FBFM). The FBFM concept was developed in 1972 by Rothermel, and Albini (1976) refined the original 11 fuel models based on a series of fire behavior calculations derived from 13 discrete fuel and vegetation types. Scott and

Burgan refined the 13 FBFM system in 2005 to create 40 FBFM, which are now widely used in fire management and considered more accurate than the original 13 fuel model system.

This CWPP utilizes the Scott and Burgan 40 FBFM methodology in order to accurately represent the current fire hazards and risks in the NFFPD. The forty FBFMs are divided into seven general fuel groups; grass, grass-shrub, shrub, timber-understory, timber litter, slash-blowdown, and non-burnable. Each group comprises four or more fuel models. Of these 40 fuel models, thirteen occur in the NFFPD in six fuel categories (Table 6). Appendix E contains information about each FBFM in the NFFPD, and can be used as a pull-out reference section.

Table 6. Fuel Models in the District

Fuel Group	Code	Description	% Cover of Area
Grass	GR1	Short sparse dry climate grass	8
Grass	GR2	Low load dry climate grass	2
Grass-shrub	GS1	Low load dry climate grass-shrub	7
Grass-shrub	GS2	Moderate load dry climate grass-shrub	11
Shrub	SH1	Low load dry climate shrub	7
Shrub	SH2	Moderate load dry climate shrub	<1
Shrub	SH5	High load dry climate shrub	<1
Shrub	SH7	Very high load dry climate shrub	2
Timber understory	TU1	Low load dry climate timber-grass-shrub	18
Timber understory	TU5	Very high load dry climate timber-shrub	15
Timber Litter	TL1	Low load compact conifer litter	1
Timber Litter	TL3	Moderate load conifer litter	16
Timber Litter	TL8	Long needle litter	2
Non-burnable	NB	Non-burnable (open water, urban, agricultural, snow, bare ground)	10

# Grass; FBFM GR1 and GR2

In these fuel models, grass is the primary carrier of fire. Grass is either naturally sparse, or heavily grazed. For both, flame lengths and rate of fire spread is quite low, and therefore do not significantly contribute to extreme fire behavior. The grass species present are common in open short grass prairie, meadows, or alpine tundra. Historically, at lower elevations, relatively frequent disturbance by wildfire removes dried biomass and woody shrub and tree species before it becomes excessive surface fuels. In fast-moving or low-intensity fires, the underground portions of plants are rarely killed, and vegetation (particularly grasses) can resprout quickly. These fuel types cover about 10% of the assessment area.

#### Grass-Shrub; FBFM GS1 and GS2

The primary carriers of fire in these fuel models are grasses and shrubs combined. Within the NFFPD, shrubs in these fuel models are mostly 1-3 feet in height, mixed with short grass. Shrub and grass species in this fuel type requires disturbance such as fire to reproduce, either by seed or root crown sprouting. Rate of spread is high due to the size and continuity of fuels, and flame lengths are moderate. These fuel types cover 18% of the assessment area.

# Shrub; FBFM SH 1, SH2, SH5, and SH7

The primary carriers in this fuel groups are shrubs and shrub litter. Vegetation cover may be multi-layered, with short shrub and herb species in the understory of dominant overstory shrubs. In some cases, Gambel oak can reach small tree size. Rate of spread is moderate to high, and flame lengths are generally moderate. These fuel types cover about 9% of the assessment area.

# **Timber Understory; TU1, TU5**

The primary carriers of fire in these fuel types are forest litter, grass, shrub, and small tree understory. Spread rate is low to moderate; flame length is low to high. Fire usually does not ladder into tree canopies unless the surface fuels reach vertically to tree crowns. However, active crown fire could spread from adjacent areas to TU fuel types if the forest canopy is continuous. Common species in the TU fuel types in this area include ground juniper, Gambel oak, Rocky Mountain juniper, ponderosa pine, and Douglas-fir. These fuel types cover 33% of the assessment area, with TU5 (very high load timber understory) representing 18% of the assessment area.

## Timber Litter; TL1, TL3, TL8

The lower foothill slopes on the western margin of the district support some stands of ponderosa (*Pinus ponderosa*) on saddles and north and west facing slopes. Further west at slightly higher elevation ponderosa stands dominate north facing slopes and typically are dense with some mixed Douglas-fir (*Pseudotsuga menziesii*). Here dead and down woody surface fuels intermingle with the grass and shrub understory. In higher elevation stands on the western side of the district, surface fuels are influenced by long needle timber litter (TL8). These fuel types cover about 19% of the assessment area.

### Non-burnable; NB

Non-burnable fuel types include a variety of substrate cover. These include open water, agricultural, bare ground, and urban. Each non-burnable fuel type has its own code and characteristics, but they are combined in this CWPP for simplicity. Non-burnable areas cover less than 10% of the assessment area.

# 3.5 Fire Protection Authority and Water Resources

Emergency fire, medical, and rescue services for the district are primarily provided by the North Fork Volunteer Fire Department. There are three fire stations in the district. They are located in Buffalo Creek, Pine Grove, and Trumbull, but only Station 1 in Buffalo Creek is staffed full-time. North Fork utilizes three type I engines carrying 1000 gallons of water each, three engine-tenders carrying 2000 gallons of water each and one type three tender. There are also three type 6 engines (brush units) for wildland operations. In addition, the US Forest Service at Buffalo Creek has two Type-6 wildland fire engines in service during the summer fire season.

Due to the district's rural location, there are no pressurized hydrant systems. Suppression resources move water using techniques called "drafting" and the "water shuttle system." This involves using atmospheric and negative pressures to take water directly from a river, stream or lake and using Tender trucks to shuttle the water to the scene of the fire. The Tenders then release their tanks into fold-out portable tanks next to an attacking engine (or a supplying engine, if driveways or narrow roads restrict access), essentially creating a pond where ever it is needed. This cycle continues through the duration of the fire. There are several drafting points along the South Platte River, which serves as a primary emergency water source for the homes along South Platte River Road. Small retention ponds located in Buffalo Creek and North Rainbow Falls can also provide water for drafting.



Figure 1. Drafting point (dry hydrant) near Longview



Figure 2. Pond and emergency fire equipment in North Rainbow Falls

## 3.6 Values at Risk

In any hazard and risk assessment, human life and welfare are the most important resources to protect. Homes, businesses, aesthetics, cultural, and ecological resources are all important factors and certainly influence any recommendation, but the safety and welfare of residents and emergency responders remains the top priority. The WUI and intermix communities in the assessment area have inherent risks: residential and commercial development in areas historically prone to fire, hazardous fuels, and limited access. These risks contribute to fires that have high resistance to control. Catastrophic wildfire has a severe and long-term impact on all natural resource and ecological values that we have come to take for granted. The actions recommended in this CWPP are geared towards lowering the wildfire risk to neighborhoods, as well as economic and ecological resources.

#### Homes

About 650 homes are located in the NFFPD, with approximately 2000 permanent and seasonal residents. The majority of homes in the area have a "high" fire hazard rating due to expected fire behavior and surrounding wildland fuels. Additionally, damage from severe flooding following severe wildfires threatens the many homes that are located on the banks of the South Platte River and its tributaries, such as Buffalo Creek. Therefore, mitigating the severity of wildfires in the area reduces multiple risks.

#### Watersheds

Another significant resource at risk is area watersheds, which are a critical part of the NFFPD and the great Denver-metropolitan area. The Upper South Platte River and its lower north fork run through the populated area of the district, and feeds into Strontia Springs and Cheesman Reservoirs, the main municipal water supply to 1.3 million residents of Denver and its outlying areas. The area is dominated by highly erosive, decomposed granitic soils. When the dense, continuous vegetation is completely burned away, there can be devastating circumstances, because severe wildfires reduce the erosion threshold of watersheds.

Following the Buffalo Creek fire in 1996, severe flooding caused by heavy thunderstorms washed out County Road 126, destroyed the town's utilities and infrastructure, and claimed the lives of two Buffalo Creek residents. The Buffalo Creek flood also caused heavy sedimentation of Strontia Springs reservoir, reducing its capacity by 93%. As of August 2010, there was still 625,000 cubic yards of sediment that needed to be dredged from the reservoir. Heavy rains and resultant flooding after the Hayman fire caused severe erosion along several miles of the upper South Platte River basin, which choked the river and its tributaries with sediment and other debris, led to heavy sedimentation in Cheesman Reservoir, and damaged infrastructure and private property. Similar severe flood damage has affected the area as recently as July of 2009.



Figure 3. Alluvial Fan. The Buffalo Creek Fire lowered the erosion threshold of the watershed. As a consequence of this wildfire, a 100-year rainstorm in July 1996 caused erosion upstream and deposition of this alluvial fan at the mouth of a tributary to Buffalo Creek. Buffalo Creek is flowing to the right at the bottom of the photograph. Photo by R. H. Meade, USGS.

#### **Local Economy**

Much of the district's economy relies on recreation and tourism. Data compiled by the Census Bureau show that in Colorado more people are involved, and spend more money, in wildlife related activities than any other state in the nation. A few small businesses are located in Pine Grove and Deckers, which are patronized by visitors to the many nearby recreation areas as well as many local residents. The loss of scenic vegetation and river access that draw tourists would severely impact the local economy. Due to the abundance of natural resources in the district, both hunting and fishing are major draws to the area. Not only are these outdoor sports a culturally significant aspect of life in the area, they support the economies of the small communities here.

#### **Historic Sites**

The NFFPD has a rich cultural and historic legacy. Native Americans, river transportation, a rail line and roadway connecting Denver to mountain and mining communities, early tourist activity, and ranches contribute to the story. The North Fork National Historic District follows 13 miles of the South Platte River, along County Roads 96 and 126, from Pine Grove south to Buffalo Creek, and east to Foxton. Historical resources foster connection to and an understanding of our past, and serve as an inspiration for future generations. These communities therefore have identified several

high-value sites that contribute to the historical significance of the area, such as the Foxton Post Office, Green Mercantile, and Baehr Lodge.



Figure 4. Baehr Lodge in Pine Grove

## **Natural Ecosystems and Habitat**

The NFFPD is home to numerous native wildlife species, such as elk, mule deer, red fox, songbirds, raptors, and threatened species such as Mexican spotted owl, Preble's meadow jumping mouse and the Pawnee montane skipper butterfly. Bald eagles are occasionally sighted along the river and near Cheesman reservoir, but in fewer numbers since the Hayman fire in 2002. Although all endemic species have endured for thousands of years with the occurrence of wildfire, loss of habitat due to exurban development results in higher negative impacts from wildfires. Effects from flooding and severe runoff after severe fires also damages aquatic and riparian habitat, which takes many years to recover.

### 4 WILDFIRE HAZARD ASSESSMENT METHODS

# 4.1 Components of Wildfire Hazard Analysis

Wildfire hazard assessment takes into account a variety of factors that ultimately result in a representative hazard ranking of the neighborhoods and subdivisions that have been collaboratively identified within the assessment area by the core team. Hazard rankings provide quantifiable guidance in the determination of mitigation treatment project prioritization.

Factors that contribute to wildfire hazard assessment are fire behavior, community infrastructure, and ignition potential. Elements that influence fire behavior include topography, weather conditions, and the type, density and configuration of vegetation and other fuels. Community infrastructure is evaluated in terms of emergency response, defensibility, and structural flammability. Ignition potential is influenced by population density, proximity to roads and other infrastructure. Overall, the relationship between expected fire behavior in wildlands and the placement and design of neighborhoods in wildland areas is at the core of an effective community wildfire hazard assessment. From this process, targeted mitigation recommendations are developed that directly address the identified hazards and, if implemented, will reduce the risk of loss from a wildfire for each homeowner as well as the community as a whole.

As part of the assessment, a concerted effort was made to solicit and include input from the public. Public meetings were convened twice during the summer of 2010 in Buffalo Creek and Deckers. The purpose of the first meeting was to introduce the CWPP concept and overall project goals and objectives. The meeting also introduced the CWPP Core Team and provided an opportunity for the public to participate in the process, review the community interface and intermix boundaries, and comment on their specific mitigation concerns. The purpose of the second meeting was to present the results of the community hazard assessment and to further solicit public input for the final report.

In addition, a questionnaire (Appendix D) was posted online and distributed at several community events and public meetings to obtain public opinion information concerning the perceived level of wildfire risk in the NFFPD, understand public values at risk, and assess attitudes about mitigation practices that may be recommended to reduce risk. WUI safety pamphlets and brochures that explained home construction and landscaping practices designed to reduce the risk of wildfire loss were also distributed. The survey was general in its scope, and response was limited. The responses do not represent a statistical sample of North Fork residents. The results of the survey can, however, give a broad picture of the overall perception of fire risk and mitigation efforts in the district. Follow-up surveys could target individual communities and/or address specific planned projects.

A total of 39 surveys were completed and returned. The majority of the respondents were from Buffalo Creek, and the second largest group of respondents was from Trumbull. Over 75% rated the fire hazard as "high" or "extreme" in their own community, and rated other areas in the NFFPD as "extreme". Nonetheless, nearly half of respondents stated

they would not leave or were unlikely to leave in the event of a wildfire. When asked which methods were the best for mitigating fire risk, most respondents selected several choices, the most common being "defensible space by private landowners" and "increasing firefighting volunteers". Relatively few chose "prescribed burns". The majority of respondents strongly support further fuel mitigation projects in their communities, and none opposed them. Based on the responses of the survey and the feedback received at community meetings, the residents of NFFPD recognize the responsibility they have in maintaining their own defensible space, but are frustrated with the lack of options for slash removal. Appendix D shows the questionnaire responses in graph form, but do not imply statistical significance.

While fires originating in or near communities are the most immediate concern, wildfires that ignite well beyond the boundaries of the planning area can have profound effects upon the communities and ecosystems in the NFFPD. The possibility for rapid rates of spread and long-distance spotting are high for typical fires in this area.

# 4.2 Fire Behavior Analysis

Fire behavior, as previously stated in section 2.2, is defined as the manner in which a fire reacts to the influences of fuel, weather, and topography. Two key measures of this behavior are the rate of spread and fire intensity. In fire management, rate of spread is expressed in chains per hour. A chain is 66 ft, and one chain per hour closely approximates a spread rate of 1 foot per minute. Fireline intensity is defined as the rate of heat energy released per unit time per unit length of fire front, regardless of the depth of the flame zone. It is calculated as the product of available fuel energy and the fires rate of advance.

Using weather data from local remote automated weather stations (RAWS) and GIS data obtained from Landfire, we created a maps that illustrate potential flame lengths in the assessment area for average (50<sup>th</sup> percentile) and extreme (90<sup>th</sup> percentile) weather conditions. Fire moving through the forest canopy (active crowning) and other types of extreme fire behavior are not represented in this analysis.

#### Fire Weather

Average and severe case weather and fuel moisture conditions were determined using records from local remote access weather stations (RAWS) during the summer wildfire season of June through August. Data from the Bailey, Cheesman, and Polhemus stations were used to best represent the climate of the assessment area. Percentile refers to historic occurrences of specified conditions. For example, 50<sup>th</sup> percentile is considered average conditions, with half the records exceeding recorded conditions and half the records below recorded conditions. Severe weather conditions are expressed as 90<sup>th</sup> percentile conditions, meaning that within the weather data examined from the RAWS stations, only 10 percent of the days had more extreme conditions. Weather was calculated for the typical summer fire season of June through August based on data from 1979 through 2009. Mid-flame wind speeds of 4 and 8 mph were used for the modeling of 50<sup>th</sup> and 90<sup>th</sup> percentile conditions, respectively.

**Table 7. Average and Severe Case Fire Weather and Fuel Moisture Conditions** 

RAWS Station	Percentile	Max Temp ºF	Relative Humidity %	1-Hour Fuel Moisture %	10-Hour Fuel Moisture %	100-Hour Fuel Moisture %	Herbaceous Fuel Moisture %	Woody Fuel Moisture %
Cheesman	50th	81	24	5	7	10	54	94
1987-2009	90th	90	11	2	3	6	29	59
Bailey	50th	78	32	6	9	13	84	119
1979-2009	90th	87	12	3	4	7	29	60
Polhemus	50th	79	25	5	6	10	57	99
2004-2009	90th	88	10	2	3	6	36	63

Additional important fire- and weather-related resources include:

- Fort Collins Interagency Wildfire Dispatch Center Web index for Fire Intelligence, Fire Weather, Fire Danger/Severity, RAWS http://www.fs.fed.us/r2/arnf/fire/fire.html
- RAWS index for the Rocky Mountain Geographic Coordinating Area http://raws.wrh.noaa.gov/cgibin/roman/raws\_ca\_monitor.cgi?state=RMCC&rawsflag=2
- National Fire Weather Page <a href="http://fire.boi.noaa.gov/">http://fire.boi.noaa.gov/</a>

#### **Potential Fire Behavior**

Fire behavior simulations were conducted for average (50th percentile) and severe (90th percentile) conditions for the critical months of the fire season, June through August (Table 11). Slope steepness was set to 20 percent.

BehavePlus software was used to generally illustrate the potential surface fire behavior given the prevailing fuel types, local topography, and local weather conditions. While any number of variables and assumptions will affect the modeled outputs, there are several significant general principles to focus on:

- The differences in surface fire behavior under 50th and 90th percentile conditions (drier fuels, windier conditions) are most pronounced in brush and grass fuels.
- This increase in fire behavior is approximately two times for flame length and three to four times for rate of spread.
- Fire behavior for most fuel types under 90th percentile conditions exceeds the 4-foot flame lengths generally considered appropriate for direct line construction with hand crews.
- If XX converts into the denser XX, the increase in fire behavior is pronounced and conducive to the initiation of crown fire.

Table 8. BehavePlus Predictions of Fire Behavior on 20 Percent Slope\*

FBFM	Flame Length (ft), average conditions <sup>1</sup>	Rate of Spread (chains/hr)**, average conditions	Flame Length (ft), severe conditions <sup>2</sup>	Rate of Spread (chains/hr), severe conditions
GR1	2	10	3	38
GR2	4	20	10	153
GS1	1	3	6	42
GS2	2	4	9	58
SH1	1	1	1	4
SH2	1	1	7	15
SH5	9	24	20	115
SH7	8	16	19	74
TU1	1	1	3	6
TU5	5	5	11	19
TL1	1	1	1	2
TL3	1	2	2	5
TL8	3	6	6	17

<sup>&</sup>lt;sup>150th</sup> percentile weather conditions: average midflame widspeed = 4mph; fuel moisture percentages: 1-hour=5%, 10-hour = 8%, 100-hour = 10%; Live herbaceous fuel moisture = 75%; live woody fuel moisture = 200%.

# 4.3 Community Hazard Assessment Methods

Community hazard rating was calculated using the NFPA 1144 assessment form. In order to expedite the overall community assessments, we developed a tally method. For each major street in a community, a small representative handful of homes were assessed individually on the same form. For example, in Buffalo Creek, we assessed approximately 20% of the homes. Rating factors such as defensible space, driveway access, and building setback from steep slopes were somewhat variable throughout the community, while factors such as severe weather potential, overall topography and road widths were consistent. If 10 homes were assessed overall, and six had defensible space <30 feet (25 points), three with 31-70 feet (10 points), and one with >100 feet (1 point), these ten homes were tallied as such on the 1144 form. Given that the majority of homes in the tally had less than 30 ft of defensible space, the score of 25 was given the most weight. However, we would assign an overall score of 20 to account for the few representative homes in the community with more defensible space, thereby reducing the hazard score by 5 points. Although the average scores can be calculated using a weighted average formula in Excel, we found that determining the score qualitatively from the tally produced similar results more quickly.

We found this method to be efficient and repeatable, and accurately reflected the overall hazard conditions in a community. This method could also be used in more populated areas to evaluate communities quickly and effectively.

<sup>&</sup>lt;sup>2</sup>90<sup>th</sup> percentile weather conditions: severe midflame widspeed = 8mph; fuel moisture percentages: 1-hour=2%, 10-hour = 3%, 100-hour = 6%; Live herbaceous fuel moisture = 30%; live woody fuel moisture = 100%.

<sup>\*</sup>All calculations were completed using 20% slope.

<sup>\*\*</sup>Chains per hour  $\approx$  feet per minute, where 1 chain = 66 feet.

#### 5 WILDFIRE MITIGATION PLAN

### 5.1 Mitigation Planning

Wildfire mitigation can be defined as those actions taken to reduce the likelihood of loss of life and property due to wildfire. The intent of mitigation is not to completely eliminate the risk of loss nor does it reduce the risk of a wildfire occurring. Effective wildfire mitigation enables residents to evacuate safely, homes to withstand the occurrence of wildfire, and firefighters to defend structures and suppress fires where possible. This can be accomplished through a variety of methods, including reducing hazardous fuels, creating defensible space around individual homes and subdivisions, utilizing fire-resistant building materials, enhancing emergency preparedness and response capabilities, upgrading current infrastructure, and developing programs that foster community awareness and neighborhood activism. Once implemented, these actions can significantly reduce the risk of loss due from wildfire to an individual home, and on a larger implementation scale, for an entire community. Most importantly, it makes WUI communities safer places to live and work, and in the event of a wildfire, enhances the safety of residents and emergency personnel.

Specific mitigation treatment recommendations for the NFFPD were identified through detailed community wildfire assessment surveys. These surveys evaluated parameters such as wildland fuels, predicted fire behavior, infrastructure, emergency response resources, and structure ignitability. The mitigation recommendations also pull from the two previous plans completed for the Lower North Fork and South Platte areas. All recommendations were reviewed and approved by the core team and other community stakeholders. Project prioritization was based on public input, practicality of implementation, and proximity to existing planned and completed mitigation projects.

Communities should seek out and take advantage of opportunities to partner with local agencies or organizations. Working cooperatively can provide communities with a higher level of technical assistance and project management. An example of a prospective partnership of this kind is a recent effort by Denver Water Board, NRCS, and local government agencies to work cooperatively with private landowners in the Strontia Springs watershed management area. As funding and new opportunities become available in the future,

#### 5.2 Recommended Actions

Action items include a variety of specific recommendations that reduce ignitability of structures, make ingress and egress safer for residents and emergency personnel, remove hazardous wildland fuels from around homes, and reduce the amount of fuels in strategic locations. Many recommended action items do not involve drastic changes to the forest; simple structural maintenance and pruning are basic, but essential components to effective mitigation.

While the NFFPD, USFS, and CSFS have worked hard to promote defensible space and land management, private landowners must accept responsibility for completing work on their own lands. Table 9 lists the recommended action items by category and they are discussed in further detail below.

Table 9. Action Items

Category	Action Items  Action Items
3,	Encourage stakeholder participation in community meetings
Public Outreach and Education	Distribute Firewise and other informational materials
	Assess individual homes
	Replace shake roofs with fire-resistant roofing materials
	<ul> <li>Implement Firewise construction principals for new construction and remodels</li> </ul>
Building Improvements	Cover vents and chimneys with metal screens
	<ul> <li>Enclose exposed decks and gables, and/or use fire-resistant construction materials</li> </ul>
	Establish a fuel-free zone around homes
	<ul> <li>Establish a treated second zone that is thinned, pruned, and cleared of excess surface fuels</li> </ul>
Defensible Space	<ul> <li>Extend thinning treatments to property boundary to reduce hazardous fuels</li> </ul>
	<ul> <li>Employ defensible space practices around resources such as cisterns, draft sites, or community safety zones</li> </ul>
	<ul> <li>Where not present, clearly mark roads and addresses with metal, reflective signs</li> </ul>
	Thin trees along main roads to avoid blockage
Access and Egress Improvements	Create or widen turnarounds
	Widen or improve narrow switchbacks
	Create secondary evacuation routes where needed
	<ul> <li>Thin in strategic areas, such as along evacuation routes and utility right- of ways</li> </ul>
	Coordinate with adjacent public land management agencies
	<ul> <li>Identify existing breaks in vegetation to expand fuelbreak areas</li> </ul>
Shaded Fuelbreaks	<ul> <li>Remove or treat slash by chipping, burning in piles, or hauling to collection site</li> </ul>
	Perform periodic maintenance where necessary
	<ul> <li>Incorporate additional management goals where appropriate (such as bark beetle infestation control)</li> </ul>
	Own and update district GIS
	Update and distribute run books
	Verify community water sources
	Conduct pre-suppression planning
Fire Department Preparedness	Conduct ongoing recruitment, training, and certification
	Coordinate mutual aid strategic planning
	<ul> <li>Upgrade apparatus, facilities, and personal protective equipment when appropriate</li> </ul>
	Explore and support grant funding opportunities
	<ul> <li>Involve Jefferson County in evacuation route improvements</li> </ul>
Supporting Actions	<ul> <li>Revise county statutes addressing defensible space requirements for home sales</li> </ul>
	Coordinate with land management agency forest management plans

#### 5.2.1. Public Outreach and Education

The most effective means of initiating local action is through community education and public outreach. Given the significant fire events in NFFPD in recent years, most local residents are well-informed of the inherent fire risk in the area, but as more people move to the area, it is necessary to maintain and improve the community's knowledge of the basic principles behind wildland fire, and the actions they can implement to increase their personal safety and that of their home. Through education, homeowners are empowered to take action on their own properties, and coordinate efforts with their neighbors to maximize the efficacy of individual treatments.

Action Item: Conduct annual community meetings each spring. Community meetings held in the spring, just prior to the main fire season, can spur action by individuals and neighborhoods and allow for coordination of cleanup efforts within the community. This can also serve as a forum for presentations by experts in the field who can answer questions, provide technical guidance, and inform community members of available resources.

**Action Item:** Firewise materials and CSFS publications should be made available to the public at each fire station, post office, HOA, and library on a regular basis.

#### 5.2.2. Building Improvements

The purpose of building improvements is to reduce structural ignitability. Structural ignitability is defined as the flammability of the home and its immediate surroundings. This separates the problem of WUI structure fire loss from other landscape-scale fire management issues, because highly ignitable homes can be destroyed during lower-intensity wildfires, whereas homes with low structural ignitability can survive high intensity wildfires. Structural ignitability, rather than wildland fuels, is the principal cause of structural losses during wildland/urban interface fires. While reducing hazardous fuels around a structure is very important to prevent fire loss, recent studies indicate that building materials have a significant influence on whether a structure will survive a wildfire.

Key structural components that increase ignitability are flammable roofing materials (e.g. cedar shingles), flammable decks and/or siding, and the presence of burnable vegetation (e.g. ornamental trees, shrubs, wood piles) immediately adjacent to homes. The area around the home, 100-200 feet, is called the home ignition zone and is the most critical area to prepare and maintain to prevent loss from fire. Investing in building improvements to decrease the structural ignitability of the home is just as important as forest management and fuels thinning on the property.

Studies of home survivability in wildfire incidents also indicate that homes with noncombustible roofs and a minimum of 30 feet of defensible space had an 85 percent survival rate. Conversely, homes with wood shake roofs and less than 30 feet of defensible space had a 15 percent survival rate. This evidence suggests that investing in building improvements to decrease the structural ignitability of the home is just as important as forest management and fuels thinning on the property. In areas where tree

removal is not desirable or possible, homeowners can still mitigate fire hazard in this way.

Action Item: All homeowners should continually keep roofs and gutters clear of leaves and pine needles. Embers from a wildfire can become windborne and travel long distances before settling, and even small amounts fine fuels on a structure can ignite and put a home at risk. Defensible space becomes inconsequential if embers cause ignition on the roof, deck, or in eaves. Clear combustible material such as firewood, trash, or woody debris from the side of the home and underneath exposed decks.

**Action Item:** Cover openings around the home, such as gutters, attic vents, chimneys, and areas under decks with screens to prevent the accumulation of fuels where embers can ignite the structure.

**Action Item:** Addresses should be clearly marked and visible from the road, preferably with reflective, durable, fire-resistant materials.

<u>Action Item:</u> Where possible, propane tanks adjacent or downhill from home should be relocated to a location uphill or at least 30 feet from the home (outside the home ignition zone).

Action Item: Replace wood-shake (cedar shingle) roofing with noncombustible roofing materials. Roofing materials rated as "Class A" include materials that are non-burnable or can withstand a high amount of radiant heat, and are therefore the most appropriate for homes in the assessment area. Jefferson County requires all new and replacement roofs in the WUI to be fire-resistant. In both Jefferson and Douglas Counties, Minimum Class "B" roofing material is required in a wildfire hazard area. Prior to receiving a Certificate of Occupancy (CO) for homes and structures with living quarters, and prior to final building inspection for accessory structures, all structures are required to meet the minimum defensible space requirements identified in the on-site assessment at the time of permitting. Minimum requirements for driveway access are permitted and enforced to obtain safe and reasonable access for every day vehicular use and ingress/egress of emergency vehicles.

#### 5.2.3. Defensible Space

Precautionary action taken before a wildfire strikes often makes the difference between saving and losing a home. Creating a defensible space around a home is a vital component in wildfire hazard reduction. These efforts are typically concentrated within 0 to 75 feet of the home to increase the chance for structure survival and create an area for firefighters to work safely in the event of a wildfire.

Homes and neighborhoods with defensible space are much more likely to be assigned structure defense crews than those without. In general, structures that do not have defensible space do not provide adequate area for firefighters and firefighting apparatus to work efficiently and safely. The risk to human life outweighs any possible benefit of trying to defend an unsafe property. Appendix I shows the Jefferson County Structure Triage Form, which enables firefighters to quickly prioritize structure defense in a

wildfire. If a structure has a score greater than 13, it is considered a "last priority" over properties with more clearance, lighter vegetation, and better access.

It is recommended that defensible space be created following the CSFS guidelines set forth in *Creating Wildfire Defensible Space Zones*, Bulletin Number 6.302 (Dennis 2003). Refer to Appendix G for the complete CSFS guidelines and treatment area size recommendations.

Action Item: Implement defensible space around all homes and structures in the assessment area. Create a fuel-free zone approximately 15 feet wide directly adjacent to the structure, which reduces structural ignitability and reduces direct flame impingement on the structure. In a secondary zone farther out from the structure, complete pruning of ladder fuels, stand thinning, and removal of dead, dying, or diseased trees for overall stand improvement. Where possible, extend forest treatments out to property line to reduce fuel loading and enhance overall forest health.





Figure 6. A home and surrounding property before and after the completion of defensible space action items. Photos from CSFS.

Table 10 outlines a phased 4-year implementation schedule communities can use to complete this action item.

Table 10. Community Defensible Space Implementation Schedule

Year	Project	Actions		
	Annual spring outreach	Contact and organize homeowners     Hold educational meeting about defensible space		
1	Annual spring/summer mitigation	Clean roofs and gutters Trim limbs and shrubs within 3 to 5 feet of home  Pake and may yard		
	miligation	<ul><li>Rake and mow yard</li><li>Assist neighbors</li><li>Organize debris disposal</li></ul>		
	Annual spring outreach	-Contact and organize homeowners		
2	Annual spring/summer mitigation	<ul><li>Clean roofs and gutters</li><li>Rake and mow yard</li><li>Organize debris disposal</li></ul>		
		-Contact and organize homeowners		
3	Annual spring outreach	<ul> <li>Identify needed improvements to construction features throughout community</li> </ul>		
	Annual spring/summer mitigation	•Where possible, coordinate projects between homeowner groups who have created defensible space and open space managed lands •Repeat yard maintenance & debris disposal		
		-Contact and organize homeowners		
	Annual spring outreach	•Follow up with landowners who have not completed defensible space, offer assistance		
4		<ul> <li>Complete any outstanding projects from previous years</li> </ul>		
	Annual spring/summer mitigation	Begin long-term maintenance (as needed, re-trim shrubs, remove small trees, etc) Initiate construction feature improvements		

### 5.2.4. Access & Egress Improvements

In addition to defensible space, it is essential for communities to have adequate access and egress. Not only does this allow for emergency personnel to access and escape properties in a wildfire, residents are also able evacuate quickly and safely when necessary. Many driveways, dead-ends, and switchbacks in the assessment area do not have adequate turnaround space for fire trucks, compromising emergency response to these properties. The North Fork Volunteer Fire Department (NFVFD) adopted the 2009 International Urban-Wildland Interface Code, which details the specifications for driveways, turnouts, turnarounds, and access roads.

Another important improvement that should be made to access roads is adequate signage. Road signs should be clearly displayed, reflective, and preferably metal. When fires become large and/or highly complex, national management teams and fire crews from out of state are dispatched to replace local resources, and will not have knowledge of the area. Clear signage for roads and addresses enable firefighters to navigate through communities they may be seeing for the first time.

#### 5.2.5. Shaded Fuelbreaks

Shaded fuelbreaks are strategically located areas where fuels have been reduced in a prescribed manner in locations that can affect fire behavior on a landscape scale. Fuelbreaks are generally strategically placed where they can be as continuous as possible. To this end, they can be placed contiguously with other fuelbreaks, larger area treatments, along roads, or adjacent to natural breaks in vegetation (such as meadows or bodies of water). When defensible space, fuelbreaks, and area treatments are coordinated, the community and the adjacent natural resources are afforded an enhanced level of protection from wildfire. Fuelbreaks have been completed on several USFS and Denver Water parcels within the plan area, and several more are planned for future treatment.

The CSFS provides guidelines on how to determine the width and prescription for fuelbreaks based up the type of fuel and topography. Fuelbreaks need to be tailored to the terrain, fuels, historic fire regimes and expected weather conditions of the landscape in which they are placed. Improperly implemented fuel treatments can have negative impacts in terms of forest health and fire behavior. Aggressively thinning forest stands in wind-prone areas may result in subsequent wind damage to some species of trees. Thinning can also increase the amount of surface fuels and sun and wind exposure on the forest floor. This may increase surface fire intensity if post-treatment debris disposal and monitoring are not properly conducted. When fuelbreaks are not thinned enough to create sufficient canopy openings, the risk of crown fire is not reduced, and the fuelbreak does not meet its intended objective. The overall benefits of properly constructed fuelbreaks are however, well documented. An area near the Hayman fire that had been recently thinned successfully stopped fire from moving through the tree canopy, which significantly reduced tree mortality in that stand. Untreated areas adjacent to the treatment area burned severely, and had nearly 100% tree mortality.



Figure 6. A WUI neighborhood and forest stand affected by the Hayman fire. The green trees in the foreground with greater canopy spacing were largely unburned, while the denser forest in the background burned more severely. Photo from USFS.

Action item: All access roads flanked by heavy vegetation in WUI and Intermix communities should be targeted for thinning or seasonal mowing. Treatments may be coordinated with property owners along private roads and with county and state transportation departments for public roads. Conifer regeneration along road margins should be controlled. A qualified forester or fire professional should evaluate the effectiveness and periodic maintenance of roadside mitigation.

Action item: In this CWPP, a strategic shaded fuelbreak has been carefully planned for each WUI and intermix community. These fuelbreaks take into account expected fire behavior, workable terrain, and existing road access. When implemented, these landscape-scale fuelbreaks are meant to protect the community as a whole by reducing potential fire behavior under most weather conditions. Where possible, these fuelbreaks were placed adjacent to completed mitigation projects on properties managed by the Forest Service and Denver Water.





before after
Figure 7. A montane forest stand in Jefferson County before and after completion of a shaded fuelbreak.

Note the tree on the right side of the picture with orange flagging to compare the change in the stand structure. Photo from Jefferson County Emergency Management.

**Action item:** Natural resource managers for public lands should take into account fire hazard for adjacent WUI and intermix communities when developing or updating forest management plans.

Action item: An ecological evaluation of the status of vegetation community recovery and rehabilitation is recommended for areas affected by fires in recent years. Monitoring should focus on the presence of noxious weeds and other invasive non-native species. Reducing the presence of invasive species such as knapweed (*Centaurea* sp.) and Dalmatian toadflax (*Linaria dalmatica*) maintains natural biodiversity. In some cases, it can help maintain historic fire regimes, especially in grasslands and shrublands.

### 5.3 Treatment Options

Each of the recommended fuel mitigation projects can be achieved by a variety of methods. Selecting the most appropriate, cost effective option is an important planning step. The brief synopsis of treatment options and cost estimates in Table 11 is provided to assist in this process. Cost estimates for treatments should be considered as general guidelines. Costs can vary tremendously based on a variety of factors, including but not limited to:

- Acreage of project
- Proximity to structures
- Fuel costs & other equipment needs
- Treatment techniques used

- Density and type of vegetation
- Steepness of slope
- Area accessibility

**Table 11. Treatment Methods** 

Treatment	Approximate Cost*	Comments
		-Appropriate for large, flat, grassy areas on relatively flat terrain
Machine Mowing	\$90 - \$200 per acre	Usually requires yearly treatment
g	φου φου φοι ασιο	Cost-effective for larger acreage
		Implementation requires trained professionals
		•Ecologically beneficial
Prescribed Fire	\$100 - \$200 per day	Provides training opportunities for firefighters
	, ,,	Inherent risk of escape may be unacceptable in some areas
		•Unpredictable scheduling due to weather and smoke management constraints
		•Some brush (shrub) species, such as Gambel oak, resprout vigorously after mechanical treatment
Brush Mastication	\$300 - \$500 per acre	•Follow-up treatment with herbicides, prescribed fire, grazing, or repeat mechanical treatments are typically necessary
		•Less expensive and faster than manual treatment
		•No need to dispose of slash
		-Large diameter trees can be felled quickly over large areas
		•Less expensive and faster than manual treatment
Timber Mastication	\$600 - \$1000 per acre	•No need to dispose of slash
		•Machinery usually limited to slopes <35%
		Rough, unattractive appearance for first year post-treatment
		•Not limited to slopes <35%
		More control of specific trees removed/left
Manual thinning and felling	\$400-\$700 per acre	•Allows for removal of merchantable/usable wood products, such as firewood
		-Slash must be chipped, hauled away, or burned in piles
		•Appropriate for steep slopes with larger-diameter trees
Feller Buncher	\$600 and up per acre	•Allows for removal of merchantable/usable wood products, such as firewood
		Generally more expensive than mastication

<sup>\*</sup>Costs per acre are based upon various area contractors' rates for work in the Colorado Front Range and are subject to change.



Figure 8. A feller buncher machine thinning a forest. Photo from USFS.

# 5.4 Project Support

Several of the recommended actions will require cooperation of various agencies that operate within the FPD. Studies, monitoring, and determination of legal jurisdictions are integral to many action items recommended in this CWPP. Although this may add complexity to implementation, it should not discourage communities from pursuing these projects.

**Funding and Grants:** Due to the high cost of large-scale forestry projects, many landowners and communities are unable to complete complex projects such as shaded fuelbreaks. Grant support may be able to accelerate implementation of treatments. The Jefferson County Office of Emergency Management is an excellent resource for information about available grants. The website

http://www.rockymountainwildlandfire.info/grants.htm is a grants clearing house with a searchable grants database, as well as other helpful information about wildfire. Information about funding sources and applicant responsibilities are located on this site.

**Access/Egress Improvements:** The proposed work on roadways may require further study to address engineering and environmental issues, and may be subject to the consent of adjacent landowners. Tenable escape routes are essential to community wildfire safety, and therefore should be considered high-priority action items when recommended.

**Public Land Planning:** The United States Forest Service, Denver Water Board, Jefferson County Open Space, and Denver Mountain Parks all manage forested wildlands in and around NFFPD. The CWPP development process is designed to facilitate dialog with these agencies and coordinate public and private wildfire and forest management strategies. As the CWPP strategic plan is implemented, dialog and collaboration should be maintained with these agencies in order to coordinate strategies and treatments, and make adjustments if necessary. Where possible, strategic fuelbreak recommendations should be coordinated with completed or planned treatment areas managed by the USFS and Denver Water Board.

Regulatory Support: One of the major issues confronting defensible space and hazardous fuels mitigation is the need for on-going maintenance of treatment areas and defensible space. County statutes require creation and long-term maintenance of defensible space for new construction and remodels exceeding 400 square feet. However, there is no retroactive regulation for existing structures. Additionally, there is no provision or current process within county government to enforce or support long-term maintenance of fuels mitigation projects. For defensible space treatments to remain effective, some regulatory impetus may be necessary. Jefferson County should examine the possibility of requiring periodic maintenance of defensible space. This could be associated with the sale of an existing home or on a period of time since initial treatment. Communities with local statutes or covenants should consider similar regulation as an interim step to help drive the initiative from the bottom up.

Douglas County adopted and enforces wildfire mitigation standards for new construction and development in a wildfire hazard area. The *Douglas County Wildfire Mitigation Standards* contain minimum standards for access, water supply, building materials, and defensible space. The wildfire mitigation standards are adopted as an Appendix Chapter to the International Building code (IBC) and the program is administered by the Building Division and the Chief Building Official (CBO) is the Authority Having Jurisdiction.

Douglas County has also adopted Appendix Chapter 59 of the IBC, Standard for Water Supplies for Rural Fire Fighting and the Wildfire Hazard Overlay District, Section 17 of the Douglas County Zoning Resolution for developing in a wildfire hazard area. More information can be found at http://www.douglas.co.us/building/wildfire/index.html

### **6 EMERGENCY OPERATIONS**

# 6.1 Response

North Fork FPD maintains one fully equipped station and two equipped unstaffed stations that are centrally located in the FPD. There are 30 volunteer firefighters, one career chief, and one part-time employee. In addition, the USFS has a workstation with a seasonal wildland engine crew in Buffalo Creek. Most residences in NFFPD are located less than five miles from a fire station, and there are currently sufficient VFD personnel to respond to the relatively small number of emergency calls they receive each year. In wildland areas outside of the WUI and intermix zones in the district, response time could be considerably longer due to rugged terrain and lack of road access. However, there is currently adequate staff and equipment to effectively handle the majority of fire and medical emergencies. Jefferson County maintains a certified Type 3 Incident Management Team for overhead support in the event of a multiple-day fire event. Should a complex fire event extend past 36 hours, a Type 2 or Type 1 IMT would need to be brought to the district. NFFPD has developed a 5-year plan (2009-2013) that addresses current response capabilities, equipment, operational goals and objectives, and future needs.

- ☐ Station 1; 19384 Highway 126, Buffalo Creek
  - Engine 1231
  - Tender 1271
  - Brush 1251
  - Rescue 1280
  - Ambulance 1282
  - Ambulance 1287
  - Command 120
- ☐ Station 2; 16675 Highway 126, Pine
  - Engine 1232
  - Tender 1272
  - Brush 1252
  - Ambulance 1289
- ☐ Station 3; 7883 S. County Highway 67, Trumbull
  - Engine 1233
  - Tender 1274
  - Brush 1253

#### **Mutual Aid**

NFFPD is part of the 1993 Intergovernmental Agreement for Mutual Aid between Fire Departments. In the event of a major structure or wildland fire, NFFPD may require additional assistance from other fire departments and government agencies. The complete definitions and limitations of local mutual aid agreements are located in the Jefferson County Annual Fire Operating Plan.

#### Training and National Wildfire Coordinating Group Positions

Given the relatively small number of emergency calls received in the district, NFVFD relies extensively on a broad range of training exercises to maintain and improve firefighters' skills. NFVFD is currently considering a requirement that all volunteers maintain a minimum of Firefighter Type I (FFT1) qualification. Maintaining or increasing the level of fireline leadership requires considerable commitment from the department and its volunteers. Completion of taskbooks for wildland firefighter/incident management positions is subject to availability of wildfire assignments. North Fork firefighter participation in prescribed fires managed by the USFS and CSFS provide excellent opportunities for fireline training and maintenance of qualifications and skills. The NWCG standards may be challenging to obtain in a timely manner, but can be used as a general guideline for training targets.

Example of NWCG positions & training targets:

- Year 1: Officers initiate FFT1/ICT5 taskbook. Classes: S-131, S-133
- Year 2: Officers complete FFT1/ICT5 taskbook. Engineers initiate FFT1/ICT5 taskbook.
- Year 3: Officers initiate ENGB taskbook. Engineers complete FFT1/ICT5 taskbook and classes S-290, S-230
- Year 4: Officers complete ENGB taskbook and begin working towards engine strike team leader (STEN) and ICT4. Classes: S-200, S-330. Engineers work towards ENGB as able.
- Additional courses that are not required, but recommended: S-290, S-230 (for ICT5), S- 215 (for ENGB).

#### **Performance Standards**

Firefighters that have an NWCG wildfire qualification of Firefighter Type 2 (FFT2) or higher must complete a yearly refresher training that includes a simulated deployment of a fire shelter and pass an arduous-level physical fitness test.

On wildfire incidents, the NFVFD adheres to standard Incident Command Structure (ICS), always providing for firefighter safety by following the 10 standard Fire Orders, the 18 Situations that Shout Watch Out, and LCES. These are listed in Appendix xx, along with fireline production rates under average weather conditions.

#### 6.2 Emergency Procedures and Evacuation Routes

In the event that the County Sheriff orders a community to evacuate because of threatening wildfire, residents should leave in an orderly manner. The Sheriff would proclaim the preferred evacuation routes and safe sites. However, the need for evacuation can occur without notice when a wildfire is imminent. Homeowners should be prepared to evacuate without formal notice.

Before residents leave, they should take every precaution to reduce the chance of structure loss if time allows. Windows and doors should be closed but not locked. Other openings should be covered. A ladder should be placed for roof access by firefighters. A fully charged hose that reaches around the house should also be available for firefighter

use. Porch lights should be left on to allow firefighters to find homes at night. Additional actions could include thoroughly irrigating the defensible space, watering down the roof, or removing patio furniture. However, human safety is the number one concern in an evacuation; staying too long could compromise a safe escape.

Families should have pre-planned meeting locations and phone numbers to call in case family members are separated. Families should take with them important papers, documents, pets, food, water, and other essential items.

Evacuation procedures vary according to subdivision. The NFFPD should ensure that every resident is familiar with these procedures, including primary and secondary routes, and the location of any designated community safety zone. Pre-plans should also outline available evacuation centers and the procedures needed to activate them. These procedures should be addressed in public or HOA meetings with information eventually being distributed door to door.

Upon returning to the home, the exterior of the house should be monitored for smoke for several days. Embers may lodge in small cracks and crevices and smolder for several hours or days before flaming.

Given that many residents of the NFFPD own horses and other livestock, large animal evacuation centers also need to be identified prior to emergencies. The Jefferson County Horse Evacuation Assistance Team (Jeffco HEAT) is a team of highly trained volunteers that operates in the area to provide large animal evacuations in wildfires and other natural disasters. Information can be found at <a href="http://jeffcoheat.org/">http://jeffcoheat.org/</a>. Douglas County Animal Response Team (CART) provides this service for those in need within Douglas County. More information about CART can be obtained from Cherie Abbot at <a href="http://www.dcsheriff.net/emergencymanagement/Staff.html">http://www.dcsheriff.net/emergencymanagement/Staff.html</a>.

### 7 CWPP MONITORING AND EVALUATION

### 7.1 CWPP Adoption

The final draft of the NFFPD CWPP was presented to the Core Team. All comments and edits were consolidated and incorporated into the document were applicable.

The HFRA and FEMA Disaster - Mitigation Act of 2000 requires that the CWPP be formally adopted by the Core Team. After plan adoption, Jefferson County, NFFPD, and the local communities within the FPD will receive additional consideration on future grant applications that can help implement the recommendations in the CWPP. While not required, an adopted CWPP may be a criterion for favorable ranking and/or a grant prerequisite of their applications.

Building partnerships among neighborhood-based organizations, fire protection authorities, local governments, public land management agencies, and private landowners is necessary in identifying and prioritizing measures to reduce wildfire hazards. Maintaining this cooperation is a long-term effort that requires the commitment of all parties involved. The CWPP shows that citizens must take an active role in identifying needs, developing strategies, and implementing solutions to address hazards, and participating in fire prevention and mitigation activities.

# 7.2 Sustaining CWPP Efforts

Implementing and sustaining the CWPP is the key to its success. The CWPP process encourages citizens to take an active role as fuel treatment strategies continue to be developed and prioritized. Maintaining the momentum created by this process is critical to successful implementation and ongoing efforts. The NFFPD is committed to supporting fire protection and emergency services within the district and surrounding areas. It is important that the district continue to provide support in maintaining hazard assessment information and emergency management coordination. Stakeholders will implement recommended actions by working with fire authorities, community organizations, private landowners, and public agencies.

### 7.3 CWPP Oversight, Monitoring, and Evaluation

As wildfire hazard reduction efforts are implemented over time and the characteristics of WUI zones change, neighborhoods may wish to reassess particular areas and update the findings of the original CWPP. All CWPPs are meant to be living documents that change in response to the changing conditions and needs of the communities. With these changes, action items may be re-prioritized or added.

NFFPD and communities should be responsible for periodic CWPP monitoring and evaluation. This can be accomplished through regular meetings, public involvement, coordination with other district partners and stakeholders. Evaluation will include analysis of the effectiveness of past mitigation projects as well as recent wildfire suppression efforts. This ongoing effort helps determine whether the CWPP goals and

objectives are being met. Table 12 provides a concise schedule and explanation of monitoring and evaluation tasks. Ultimately, the responsibility lies with the community given the USFS nor the CSFS mandates completion of mitigation on private property. It is in the best interest of these local stakeholders to follow through and help implement the CWPP for the benefit to their communities.

**Table 12. Monitoring and Evaluation Tasks** 

Objective	Table 12. Monitoring and Evaluation Tasks	Timeline		
	•Use reliable data that is compatible among partner agencies			
Risk & Hazard Assessment	•Update CWPP as new information becomes available	As needed		
	Periodically assess wildfire risks and hazards in communities			
	Identify and prioritize fuels treatment projects on public land through development of a 5-year plan	As needed		
Fuels Reduction	•Track fuels reduction and defensible space projects on private land			
	Monitor fuels redution projects along evacuation routes			
	•Track grants and other funding sources and submit appropriate applications	Ongoing		
	Provide training opportunities for firefighters	Annual		
Emergency Management	Review suitability and need for additional fuels reduction	Biennial		
	Plan and hold Firewise education week	Annual		
Public Outreach	ProvideFirewise pamphlets at public events	Ongoing		
	•Evaluate techniques used to motivate and educate private landowners	Annual		

### SOURCE MATERIAL AND ADDITIONAL INFORMATION

- Agee, J.K. B. Bahro, M.A. Finney, P.N. Omi, D. B. Sapsis, C.N. Skinner, J.W. van Wagtendonk, C.P.Weatherspoon. 2000. The use of shaded fuelbreaks in landscape fire management. Forest Ecology and Management 127: 55-66.
- Agee, J.K., C.N. Skinner. 2005. Basic principles of forest fuel reduction treatments. Forest Ecology and Management 211: 83-96.
- Anderson, H.D. 1982. Aids to determining fuel models for estimating fire behavior. General Technical Report INT-122, USDA Forest Service, Intermountain Forest and Range Experiment Station, Ogden, UT.
- Arvi, J., R. Gregiry, D. Ohlson, B. Blackwell, and R. Gray. 2006. Letdowns, wake-up calls, and constructed preferences: people's response to fuel and wildfire risks. Journal of Forestry, June 2006.
- Brown. J.K. 2000. Ecological Principles, Shifting Fire Regimes and Management Considerations, In: Proceedings of the Society of American Foresters National Convention, September 18-22, 1994. Anchorage, Alaska. Society of American Foresters, Washington, D.C.
- Cohen, J.D. 2000. Preventing disaster: Home ignitability in the wildland-urban interface. Journal of Forestry 98 (3): 15-21
- Cohen, J. and J. Saveland. 1997. Structure Ignition Assessment Can Help Reduce Fire Damages in the W-UI. Fire Management Notes 57(4): 19-23.
- Colorado Natural Heritage Program. 2010. Ecological Systems of Colorado. Retrieved from: http://www.cnhp.colostate.edu/download/projects/eco\_systems/
- Colorado State Forest Service. 2009. Minimum Standards for Developing Community Wildfire Protection Plans Colorado State Forest Service. November 2009.
- Dennis F.C. 2005. Fuel Break Guidelines for Forested Subdivisions and Communities. Colorado State Forest Service. Fort Collins, Colorado.
- Dennis, F.C. 2003. Creating Defensible Space Zones. Bulletin No.6.302, Colorado State University Cooperative Extension. Fort Collins, Colorado. (Internet access at www.colostate.edu/library/).
- Firewise. 2010. Internet access: http://www.Firewise.org.
- Gallamore, A. 2011. Significant wildfire history within the wildland-urben interface: CSFS Golden District and Immediate Vicinity. Colorado State Forest Service, unpublished, Golden, CO.

- Greenwood, G.A., G. Butler. 2007. Evergreen draft community wildfire protection plan. Walsh Environmental Scientists and Engineers, LLC. On behalf of Jefferson County Department of Emergency Management.
- Hann, W.J. and D.L. Bunnell. 2001. Fire and Land Management Planning and Implementation Across Multiple Scales. International J. Wildland Fire 10:389-403.
- Hardy, C.C., K.M. Schmidt, J.P. Menakis, R.N. Sampson. 2001. Spatial Data for National Fire Planning and Fuel Management. International J. Wildland Fire 10:353-372.
- High Plains Regional Climate Center. Retrieved from http://hprcc.unl.edu.
- Moody, J. and D.A. Martin. Hydrologic and Erosion Responses of Burned Watersheds. Retreived from http://wwwbrr.cr.usgs.gov/projects/Burned\_Watersheds/.
- National Fire Protection Association. 2002. Standards for protection of life and property from wildfire. NFPA 1144, Quincy, MA.
- National Wildfire Coordinating Group, March 2004. Fireline Handbook. PMS 410-1.
- National Interagency Fire Center, BLM National Fire & Aviation Training Support Group, Boise, ID.
- North Fork Volunteer Fire Department. 2008. North Fork Fire Protection District 5-Year Plan.
- Omi, P.N and L.A. Joyce (Technical Editors). 2003. Fire, Fuel Treatments, and Ecological Restoration: Conference Proceedings. RMRS-P-29, U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station, Fort Collins, CO.
- Society of American Foresters. 2004. Preparing a Community Wildfire Protection Plan: A Handbook for Wildland-Urban Interface Communities. Bethesda, Maryland.
- Scott, H. R.E. Burgan. 2005. Help with using the 2005 set of standard fire behavior fuel models. United States Geological Survey. Retrieved from http://frames.nbii.gov/documents/fuels/NewFuelModels2.pdf.